

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 619 104 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

13.03.2002 Bulletin 2002/11

(21) Application number: **93919658.0**

(22) Date of filing: **14.09.1993**

(51) Int Cl.7: **A61N 7/00**

(86) International application number:
PCT/JP93/01310

(87) International publication number:
WO 94/06380 (31.03.1994 Gazette 1994/08)

(54) **ULTRASONIC IRRADIATION APPARATUS**

ULTRASCHALLBESTRAHLUNGSGERAET

DISPOSITIF D'IRRADIATION ULTRASONORE

(84) Designated Contracting States:
DE FR

(30) Priority: **16.09.1992 JP 24617992**

(43) Date of publication of application:
12.10.1994 Bulletin 1994/41

(73) Proprietor: **Hitachi, Ltd.**
Chiyoda-ku, Tokyo 101 (JP)

(72) Inventors:

- **UMEMURA, Shinichiro 3-6-18, Akatsukicho Tokyo 192 (JP)**
- **KAWABATA, Kenichi Hitachi Hatoyamaryo Hiki-gun Saitama 350-03 (JP)**
- **UCHIDA, Kenko 2-23, Hitachi Hatoyama Hausu Hiki-gun Saitama 350-03 (JP)**
- **YASUDA, Kenji Hitachi Hatoyamaryo 2527, Akanuma Saitama 350-03 (JP)**
- **WADA, Yasuo 6-14-5, Otsuka Tokyo 112 (JP)**

• **HIRAIWA, Atsushi 2-21-10, Suwacho Tokyo 189 (JP)**

(74) Representative: **Strehl Schübel-Hopf & Partner Maximilianstrasse 54 80538 München (DE)**

(56) References cited:

EP-A- 0 351 610 GB-A- 1 389 291
JP-A- 2 126 848 US-A- 3 991 933
US-A- 4 375 991

- **PROCEEDINGS OF THE 7TH INTERNATIONAL CONGRESS ON ACOUSTICS 18-26 AUG. 1971, BUDAPEST, HUNGARY, AKADEMIAI KIADO, pages 193-196, XP 000564800 ADLER L ET AL 'Excitation of fractional harmonic ultrasonic waves'**
- **ULTRASONICS (UK), vol. 19, no. 5, September 1981 UK, pages 217-224, XP 000560643 MILLER D L ' Ultrasonic detection of resonant cavitation bubbles in a flow tube by their second-harmonic emmissions.'**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 619 104 B1

Description

TECHNICAL FIELD

5 **[0001]** The present invention relates to an apparatus for generating ultrasonic waves such as an ultrasonic therapeutic apparatus suitable for medical treatment of malignant tumors and medical treatment of thrombi and calculi, an ultrasonic diagnostic apparatus having the function of generating ultrasonic cavitation for emphasizing an ultrasonic echo image of, for example, blood flow, an ultrasonic apparatus accelerating chemical reactions, an ultrasonic cleaning apparatus for solid surfaces, an ultrasonic bubble generating apparatus or a sterilizing apparatus for liquid.

BACKGROUND ART

15 **[0002]** A medical treatment of malignant tumors and a remedy for calculi which are based on irradiation of a converging high-intensity acoustic wave have been expected to serve as a noninvasive modality which does not depend on operation and as a modality which makes much of the quality of life after operation of a patient and-increase their social value more and more in future, too. Acoustic cavitation is considered to play an important role in generating the effect of medical treatment based on high-intensity focused acoustic wave irradiation. It has also been known that acoustic cavitation plays an important role also in accelerating chemical reactions and in cleaning based on ultrasound irradiation.

20 **[0003]** As a method of efficiently inducing the generation and collapse under pressure of acoustic cavitation for the above purposes, a technique has hitherto been reported as proposed in JP-A-2-126848, according to which ultrasonic waves are irradiated by switching acoustic fields at intervals of 1 to 100 msec. In this technique, based on the fact that the ultrasonic irradiation time, 1 to 100msec, is needed for generation of acoustic cavitation, ultrasonic irradiation is carried out while switching acoustic fields of different wave fronts at intervals of the above time range whereby the cycle of generation of acoustic cavitation by one acoustic field and collapse under pressure of the acoustic cavitation by the other acoustic field is repeated. Through this, the efficiency of ultrasonic chemical reaction could be an order of magnitude improved for the same ultrasonic power in comparison with the case without the switching of acoustic fields.

30 **[0004]** In the semiconductor device production process, high-density integration of device prevails and concomitantly therewith, deposition of minute foreign matters on substrates or surface contamination affect the yield of products to a great extent. Therefore, the cleaning process becomes very important in the semiconductor device production process. When an ultrasound is irradiated on a liquid containing minute gas, pressure increase and pressure reduction due to the ultrasound, which are waves of condensation and rarefaction, are caused in a local region, bubbles of a size corresponding to a frequency of the ultrasound are vibrated, and collapse under pressure of bubbles occurs because of a phenomenon called acoustic cavitation. It has been known that the cleaning effects are observed on the condition that acoustic cavitation takes place and by virtue of this characteristic, the acoustic cavitation phenomenon is widely used for cleaning processes; cleaning of semiconductor substrates, glasses or tableware.

35 **[0005]** Since the ultrasound changes its cleaning effect in accordance with the form of its irradiation, a variety of methods for improving the efficiency of cleaning by arranging the location where an ultrasound irradiated portion have been devised. However, such arrangement could not improve the cleaning efficiency sufficiently. For more efficient cleaning, a method is needed which can efficiently generate acoustic cavitation serving as a source of cleaning. As a conventional example in which an irradiation source of ultrasound is contrived in an ultrasonic cleaning apparatus, a cleaning apparatus as disclosed in JP-A-2-157078 has been devised which has higher cleaning power than the case of an ultrasound of a single frequency by having a source for generating ultrasonic waves of a plurality of frequencies. In this example, the additive effect of the ultrasonic waves irradiated from the respective ultrasound sources could be attained but the cleaning effect could be limited because a combination of frequencies was not so set as to generate acoustic cavitation efficiently.

40 **[0006]** Conventionally, in sterilization of liquid, a method using chlorine or ultraviolet rays has been used widely. In the case that the composition of liquid may be changed, especially, in the case of waste liquid disposal, chlorine treatment is used and in order to perform sterilization which does not change the composition of liquid to a great extent, ultraviolet rays are used.

45 **[0007]** The sterilization using chlorine has been practiced for a relatively long time but it changes the composition of a liquid to be processed and so requires operations such as neutralization and removal of remaining chlorine to allow the sterilized liquid to be used for another purpose, raising problems from the standpoint of safety and environmental cost. The sterilization using ultraviolet rays does not use any chemicals and so it is used widely as a sterilization method which is simple and makes easy the handling of liquid after sterilization. However, since most of organic compounds has large absorption coefficient of ultraviolet rays, ultraviolet rays are not expected to be effective for a liquid containing a large amount of organic compounds unless the liquid is located near a light source. It has been known that when an

ultrasound is irradiated on liquid, acoustic cavitation occurs and sterilization can be induced thereby.

[0008] However, when taking the application to medical treatment, for a particular example, there are so many different situations in real clinical applications even with the above-described techniques, ultrasonic power necessary for obtaining sufficient therapeutic effects is not always of a sufficiently small level from the standpoint of the potential side effects due to the ultrasound. On the other hand, even in the conventional techniques improved as described previously, only a very small part of irradiated ultrasonic energy is converted into the energy effective for generation and collapse under pressure of acoustic cavitation and in this respect, there still remained a need of improving the efficiency in principle. Accordingly, there is the need to have a technique which can afford to obtain the same therapeutic effect by a smaller ultrasonic power level than that of the aforementioned conventional techniques and its realization has been desired strongly for the sake of carrying out medical treatment while suppressing the side effects as far as possible.

[0009] A known ultrasonic apparatus for therapeutical use, especially for activating an anticancer drug deep under the surface of body tissue, is disclosed in EP-A-351 610. This apparatus emits a plurality of ultrasonic waves which can have different frequencies, at subsequent times. The waves are preferably burst waves.

[0010] US-3,991,933 relates to an apparatus for soldering, wherein the part to be soldered is immersed in a bath of molten solder and is caused to vibrate by ultrasonic energy of a square or sawtooth wave imposed on the solder bath. The precharacterising part of claim 1 starts out from an apparatus for generating ultrasonic waves as disclosed in this document.

SUMMARY OF THE INVENTION

[0011] It is an object of the invention to provide an apparatus for generating ultrasonic waves, which can cause acoustic cavitation with high efficiency.

[0012] This object is solved by the apparatus set forth in claim 1. The dependent claims are directed to preferred embodiments of the invention. Claims 14 and 18 relate to an implementation of the invention in an ultrasonic cleaning apparatus and a liquid sterilising apparatus.

[0013] The invention can be implemented in an ultrasonic therapeutic apparatus which can essentially eliminate the side effects, or a highly efficient ultrasonic chemical reaction accelerating apparatus, ultrasonic cleaning apparatus or ultrasonic sterilizing apparatus. In addition, the invention can be used in an ultrasonic therapeutic apparatus with the function of preventing erroneous irradiation by visualizing the efficiently generated acoustic cavitation as an ultrasonic image or to improve the imaging capability of an ultrasonic diagnostic apparatus by emphasizing an echo characteristic of, for example, a blood flow.

[0014] And the invention makes it possible to provide a cleaning apparatus with an ultrasound source at a plurality of frequencies which has higher cleaning capability than the case of a single frequency and also provide higher cleaning effects as a result of the synergistic effect of the plural frequencies by setting a combination of the frequencies for efficient generation of acoustic cavitation.

[0015] Since the size of bubbles participating in acoustic cavitation is essentially inversely proportional to the ultrasound frequency, large bubbles collapse under pressure when a low frequency is used. With an increase in density of integration, the size of a pattern on a semiconductor device decreases and when an ultrasound wave at a low frequency of, for example, 20kHz is used for cleaning, the size of a bubble generated by acoustic cavitation approximates that of a pattern formed on a semiconductor device, bringing about such a potential adverse influence that a bubble enters a groove of the pattern on the semiconductor device and will not go out of the groove. Therefore, a high ultrasound frequency must be used but there arises a problem that acoustic cavitation effective for cleaning is unapt to be generated at a higher frequency. The present invention can provide a cleaning apparatus which has higher cleaning capability than the conventional apparatus by generating acoustic cavitation effective for cleaning even at a high frequency of, especially, 500kHz or higher employing an ultrasonic irradiation method which induces highly efficient generation of acoustic cavitation which is a source of cleaning. The aforementioned collapse under pressure of a bubble due to acoustic cavitation leads to generation of a local region of high pressure and high temperature under a specified condition, but in the conventional ultrasonic cleaning apparatus, only the mechanical effects of the acoustic cavitation are notified and there is no example of a cleaning apparatus utilizing the chemical effects of the acoustic cavitation. The cleaning effect of ultrasound is classified into one based on mechanical effects and the other based on chemical effects. In ordinary ultrasonic cleaning at a low frequency, the mechanical effect is dominant. Cleaning with ammonia and hydrogen peroxide or hydrogen peroxide and sulfuric acid in the process of semiconductor devices includes a chemical process of oxidizing the surface of a semiconductor device or a substance deposited on the surface of the semiconductor device. The present invention enables sufficient cleaning effects in connection with such chemical cleaning.

[0016] When an ultrasound is used for sterilization of liquid, the problem that the effect can be attained only near a generating source can be avoided in contrast to the case of ultraviolet rays. Also, since the composition of liquid is less changed by the treatment than in the case of using chlorine, liquid after sterilization can be used without being subjected to a post-treatment. While in the conventional ultrasonic irradiation method acoustic cavitation inducing the

sufficient sterilization effect cannot be generated and consequently sterilization due to an ultrasound was hardly carried out, the present invention is also suitable for generating acoustic cavitation in a sterilizing apparatus having sufficient sterilization effects in comparison with sterilization using chlorine or ultraviolet rays.

5 BRIEF DESCRIPTION OF DRAWINGS

[0017] Fig.1 is a diagram showing an example of a second harmonic superimposed wave.

[0018] Fig.2A is a diagram showing a resultant superimposed waveform from a waveform p1 at the fundamental frequency, $\sin(2\pi ft)$, and a waveform p2 at the second harmonic frequency $-\sin(4\pi ft)$.

10 [0019] Fig.2B schematically shows the waveform p2 of the second harmonic and behavior of the generated bubbles are shown on upper and lower sides of that waveform.

[0020] Fig.2C is a diagram schematically showing the waveform p1 of the fundamental and behavior of bubbles which are generated on upper and lower sides of that waveform p1 by the waveform p2 of the second harmonic wave and grow further.

15 [0021] Fig.3 is a block diagram showing the configuration of an embodiment of an ultrasonic irradiation apparatus according to the present invention.

[0022] Fig.4A is a top view showing an example of the configuration of an ultrasonic transducer unit in the embodiment of Fig.3.

20 [0023] Fig.4B is a side view showing the example of the configuration of the ultrasonic transducer unit in the embodiment of Fig.3.

[0024] Fig.5 is a diagram showing another example of the configuration of the ultrasonic transducer unit in the embodiment of Fig.3.

[0025] Fig.6 is a diagram showing experimental results of a sono-chemical reaction due to the second harmonic superimposed wave.

25 [0026] Fig.7 is a block diagram showing the configuration of another embodiment of the ultrasonic irradiation apparatus according to the present invention.

[0027] Fig.8 is a sectional view showing the configuration of a piezoelectric thickness mode vibrator element of an ultrasonic transducer unit in the embodiment of Fig.7.

30 [0028] Fig.9 is a diagram showing an example of a rectangular drive waveform for the piezoelectric thickness mode vibrator element of Fig.8.

[0029] Fig.10 is a diagram showing an example of a stepped drive waveform for the piezoelectric thickness mode vibrator element of Fig.8.

[0030] Fig.11 is a diagram showing the configuration of the peripheral circuit a piezoelectric vibrator element of ultrasonic transducer unit in the embodiment of Fig.7.

35 [0031] Fig.12 is a diagram showing an example of the configuration of the circuit to drive a piezoelectric vibrator element of the ultrasonic transducer unit in the embodiment of Fig.7.

[0032] Fig.13 is a diagram showing an example of a push-pull type switching circuit constituting the circuit to drive piezoelectric vibrator element of the ultrasonic transducer unit in the embodiment of Fig.7.

40 [0033] Fig.14A is a top view showing the configuration of an example of the ultrasonic transducer unit in the embodiment of Fig.7.

[0034] Fig.14B is a side view showing the configuration of the example of the ultrasonic transducer unit in the embodiment of Fig.7.

[0035] Fig.15 is a diagram showing another example of the configuration of the ultrasonic transducer unit in the embodiment of Fig.7.

45 [0036] Fig.16 is a diagram showing another example of the circuit to drive a piezoelectric vibrator element of the ultrasonic transducer in the embodiment of Fig.7.

[0037] Fig.17 is a time chart for stepped waveform driving the piezoelectric thickness mode transducer of Fig.8.

[0038] Fig.18 is a sectional view of an example of a single focus manual scanning type transducer adoptable in the present invention.

50 [0039] Fig.19 is a sectional view of a comparative example of a non-focus type plane wave transducer, which is not part of the present invention.

[0040] Fig.20 is a sectional view of an example of a stylus transducer for pricking adoptable in the present invention.

[0041] Fig.21 is a diagram showing an example of the configuration of an intraoperative therapeutic ultrasound transducer according to the present invention.

55 [0042] Fig.22 is a diagram showing another example of the configuration of the intraoperative therapeutic ultrasound transducer according to the present invention.

[0043] Fig.23 is a diagram showing an example of the configuration of a reactor of an ultrasonic chemical reaction apparatus according to the present invention.

[0044] Fig.24 is a diagram showing another example of the reactor of the ultrasonic chemical reaction apparatus according to the present invention.

[0045] Fig.25 is a diagram showing an example of the configuration of an ultrasonic cleaning apparatus according to the present invention.

[0046] Fig.26 is a diagram showing another example of the configuration of the ultrasonic cleaning apparatus according to the present invention.

[0047] Fig.27 is a diagram showing still another example of the configuration of the ultrasonic cleaning apparatus according to the present invention.

[0048] Fig.28 is a diagram showing experimental results of oxidation induced by ultrasonic irradiation while changing the phase relation between the fundamental and the second harmonic wave which are superimposed to each other.

[0049] Fig.29 is a diagram showing an example of the configuration of a sterilizing apparatus according to the present invention.

[0050] Fig.30 is a diagram showing another example of the configuration of the sterilizing apparatus according to the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

[0051] It has been known that when a sinusoidal ultrasound with a relatively high intensity propagates in a medium such as a living body or a liquid, its pressure waveform changes from a sine wave to a so-called N-wave (a wave in which the rise of pressure is more rapid than the fall of pressure) as the propagation proceeds. This is due to such a non-linear property of the medium that as the pressure in the medium increases, the acoustic speed increases, and in the case of a pulsed ultrasound, it has been known that the pressure waveform changes to a waveform having a larger positive peak pressure than a negative peak pressure as the propagation proceeds. On the other hand, it has been known that acoustic cavitation is unlikely to be generated in an acoustic field called a transmission mode or a propagation mode in which any high-intensity reflectors do not exist but is likely to be generated in an ultrasonic acoustic field in which high-intensity reflectors exist. The above can be explained by considering that the wave in which the fall of pressure generated by propagation of an ultrasound is more gradual than the rise of pressure or the negative peak pressure is smaller than the positive peak pressure are disadvantageous to the generation of acoustic cavitation but the waveform becomes advantageous to the generation of acoustic cavitation when phase inversion by a reflector takes place.

[0052] Based on the above consideration, the present invention proposes that an ultrasound considered to be generated as a result of phase inversion in the above case and having a waveform advantageous to the acoustic cavitation generation can be obtained through synthesis without resort to any reflectors by causing an ultrasound of a fundamental frequency to be added with an ultrasound having a frequency which is twice the fundamental frequency at an object to be irradiated. More particularly, as shown in, for example, Fig.1, by adding to an ultrasound p1 of a fundamental frequency an ultrasound p2 having a frequency which is twice the fundamental frequency in a suitable phase relationship, an ultrasound p1 + p2 which has a waveform advantageous to the generation of acoustic cavitation and having a larger negative pressure peak than a positive pressure peak can be synthesized.

[0053] A wave transmitter may be so configured that the fundamental wave p1 and the second harmonic wave p2 are generated simultaneously from the same wave transmitter element or alternatively they are generated from separate wave transmitter elements and are synthesized at substantially the same focal point. A first embodiment proposes that an array type wave transmitter is used which is so configured that a fundamental wave p1 and a second harmonic wave p2, which are able to generate acoustic cavitation in the region more limited to the vicinity of a focal point, are generated from a plurality of wave transmitter elements, respectively, whereby the focal point of the fundamental wave p1 and a focal point of the second harmonic wave p2 are superimposed to each other while they are electronically scanned simultaneously.

[0054] This embodiment also proposes that in order to allow a position of the acoustic cavitation generation be supervised in the form of a position in an ultrasonic echo image, an ultrasonic echo image of an irradiated object is formed simultaneously by transmitting and receiving a pulse wave of a higher frequency than the second harmonic wave.

[0055] A second embodiment proposes an example in which simultaneous generation of the fundamental frequency wave p1 and second harmonic wave p2 from the same wave transmitter element is contrived.

[0056] Another embodiment proposes effective utilization of the aforementioned acoustic cavitation generation in such a chemical process as oxidizing the surface of a semiconductor device or substances deposited on the surface of a semiconductor device, for example, cleaning using ammonia and hydrogen peroxide or hydrogen peroxide and sulfuric acid in the process of semiconductor device production.

[0057] Another embodiment proposes an application to sterilization of liquid.

[0058] A concrete example of the synthesis of an ultrasound of fundamental wave p1 and an ultrasound of second

harmonic wave p2 which can generate acoustic cavitation efficiently at an irradiated object in these embodiments will first be explained.

[0059] Figs.2A and 2B show an acoustic pressure waveform obtained when the phase relation is set such that an ultrasound form p1 of fundamental frequency f is represented by $\sin(2\pi ft)$ with respect to time t and a second harmonic waveform p2 is approximated by $-\sin(4\pi ft)$, demonstrating an example in which the fall of a synthesized acoustic pressure is steeper than the rise thereof to act on the generation of acoustic cavitation very advantageously. Taking this case as an example, the generation and function of acoustic cavitation will be described with the aid of diagrams.

[0060] Fig.2A is a diagram showing a waveform resulting from synthesis of the fundamental frequency waveform p1 of $\sin(2\pi ft)$ and the second harmonic waveform p2 of $-\sin(4\pi ft)$. Fig.2B diagrammatically shows the second harmonic waveform p2 and behavior of bubbles which are generated and grow on the upper and lower sides of the waveform p2. Fig.2C diagrammatically shows the fundamental waveform p1 and behavior of the bubbles, generated and caused to grow by the second harmonic waveform p2, which further grow on the upper and lower sides of the waveform p1.

[0061] Firstly, the generation of acoustic cavitation is started by the second harmonic wave p2 ($= -\sin(4\pi ft)$). Since the radius of a resonant bubble due to the second harmonic wave is small amounting to a half of the radius of a resonant bubble due to the fundamental wave p1 ($= \sin(2\pi ft)$), the initiation of acoustic cavitation effected using the second harmonic wave is significantly advantageous over that effected using only the fundamental wave p1. In that case, the radius of a cavitation bubble vibrates at the period of the second harmonic wave but in the initial phase of the generation of bubble, the bubble radius is smaller than the resonant bubble radius and has a maximum (for example, b1) at a negative pressure peak of the second harmonic wave and a minimum (for example, b2) at a positive pressure peak as shown at an upper part in Fig.2B. In other words, enlargement and reduction are repeated within a size range of from b2 to b1.

[0062] When cavitation bubbles grow by receiving energy of the second harmonic wave p2 and the radius of a cavitation bubble reaches to approximate the radius of a resonant bubble due to the second harmonic wave, the phase of vibration of the bubble radius is delayed by 90° and the bubble radius has a maximum (for example, b3) at a zero-cross point from negative pressure to positive pressure. A bubble corresponding to positive pressure (for example, b4) remains essentially identical to a bubble in the phase of non-resonance.

[0063] In this case, with the superimposition of the fundamental wave p1 effected in the above-described phase relation, the timings for maximizing the vibrator element radius coincide with a timing of a negative pressure peak of the fundamental wave once every two periods (for example, c1) and as a result, the cavitation bubble further grows by receiving energy of the fundamental wave, reaching at least the size (for example, c2) of a resonant bubble due to the fundamental wave. Even in the fundamental wave, a bubble corresponding to positive pressure remains essentially identical to a bubble corresponding to positive pressure in the initial phase in the second harmonic wave (for example, c3 and c4) regardless of the resonance and non-resonance phases.

[0064] When a grown bubble collapses under pressure, an internal gas is adiabatically compressed to generate energy locally. In order for the energy to be sufficient for the purpose of triggering a chemical reaction, the bubble subject to collapse under pressure must be at least larger than a certain size. By selecting the fundamental frequency which is somewhat low, the size of a resonant bubble at the fundamental frequency can be set to the necessary size or larger. In the case where the fundamental frequency alone is irradiated, however, there arises a problem that the cavitation generation cannot be started successfully if the resonant bubble due to the fundamental wave is too large. Contrarily, by effecting the superimposition of the second harmonic wave in the suitable phase relation by using the method of the present invention, each of the initiation of the cavitation generation and the growth of the cavitation bubble to a sufficient size can be accomplished efficiently through the cooperation of the second harmonic wave with the fundamental wave.

[0065] In addition, when an ultrasonic imaging unit is used which transmits/receives a pulse wave of a frequency higher than that of the second harmonic wave to form an ultrasonic echo image of an irradiated object, monitoring with self-matching capability due to wave motion having a speed essentially equal to that of the ultrasound which exerts acoustic cavitation on an irradiated object will be possible and therefore monitoring relatively immune to the influence of a acoustic speed distribution of an intermediate medium can be realized. Further, by configuring the ultrasonic imaging unit to enable it to receive a frequency component of an even multiple of the second harmonic ultrasound which exerts acoustic cavitation on an irradiated object, a position where an acoustic cavitation is generated or a position where acoustic cavitation will be generated with high possibility can be displayed while being superimposed on an ultrasonic echo image.

[0066] The first embodiment of the present invention will now be described in greater detail with reference to Fig.3 to 6.

[0067] The overall configuration of an embodiment of an ultrasonic irradiation apparatus according to the present invention having the function of monitoring the position where acoustic cavitation is generated is shown in Fig.3 and the configuration of an ultrasonic transducer unit is shown in Figs.4A and 4B and Fig.5.

[0068] Information concerning the ultrasonic irradiation therapeutic strategy is input from key input means 31 to an irradiation unit main control circuit 20 and on the basis of the information, irradiation focus/code signals for defining

irradiation acoustic fields of a fundamental wave and a second harmonic wave as well as focus positions/acoustic pressure distribution forms of the respective waves are applied from the irradiation unit main control circuit 20 to a drive phase generating circuit I (11) and a drive phase generating circuit II (12), respectively. Phases for drive of transducer elements for irradiating the generated fundamental wave and second harmonic wave are applied to drive signal generating circuits 7-1 to 7-N (N being the total number of ones of transducer independent elements which are used for the fundamental wave) and drive signal generating circuits 8-1 to 8-M (M being the total number of ones of transducer independent elements which are used for the second harmonic wave), respectively. Drive amplitudes of the fundamental wave and the second harmonic wave are applied from the irradiation unit main control circuit 20 to the drive signal generating circuits 7-1 to 7-N and 8-1 to 8-M, respectively. Drive signals for the generated fundamental wave and the second harmonic wave are applied to element drive circuits 3-1 to 3-N and 4-1 to 4-M, respectively, to drive a group of irradiation transducer elements of fundamental wave 1-1 to 1-N and a group of irradiation transducer elements of second harmonic wave 2-1 to 2-M, respectively. The drive amplitudes can also be controlled by signals supplied from the irradiation unit main control circuit 20 directly to the element drive circuits 3-1 to 3-N and 4-1 to 4-M, thereby ensuring steady and easy operation of emergency stop of ultrasonic irradiation upon occurrence of abnormality.

[0069] An irradiation transducer composed of the group of fundamental wave elements 1-1 to 1-N and the group of second harmonic wave elements 2-1 to 2-M acts also as a receiving transducer for detection of cavitation generated in an irradiated object. Signals received by the respective elements are removed of components of the irradiation signal band by means of band-reject filters 5-1 to 5-N and 6-1 to 6-M, then led to receiving amplifiers 9-1 to 9-N and 10-1 to 10-M, respectively, so as to be amplified thereby, and applied to a receiving focus circuit I (13) and a receiving focus circuit II (14), respectively. Since an output port of each of the fundamental wave drive circuits, 3-1 to 3-N, and an output port of each of the second harmonic wave drive circuits, 4-1 to 4-M, contain a series inductance which resonates with the sum of an element capacitance and a cable capacitance at the fundamental frequency, f_0 , or the second harmonic, $2f_0$, the output impedance of the drive circuit will not act as a shunt at frequencies detuned from the respective f_0 , $2f_0$ to interfere the receiving sensitivity.

[0070] The receiving amplifiers, 9-1 to 9-N and 10-1 to 10-M, are of variable gain and their gains are controlled by signals directly supplied from the irradiation unit main control circuit 20. During a time zone in which many unwanted signal components are generated off the irradiation ultrasonic center frequency, for example, during switching the irradiation focus, the gains are downed to avoid saturation of the amplifiers. The respective receiving focus circuit I (13) and receiving focus circuit II (14) have parallel focus circuits for effecting focusing on a plurality of focal points arranged in an irradiation focusing region at a spacing corresponding to spatial resolution of the receiving system, whereby they detect the generation and the generated positions of ultrasound components radiated by cavitation: subharmonic components having frequencies $f_0/2$ and $f_0/3$, harmonic components having frequencies $4f_0$, $6f_0$ and $8f_0$ and harmonic components of subharmonic components having frequencies $3f_0/2$, $5f_0/2$ and $7f_0/2$, etc. Signals indicative of cavitation generation positions and generation intensity are applied to a display circuit 30. Here, if parallel processing focus circuits which are smaller in number than the aforementioned focal points are used to scan the individual focal points, reduction of costs of the receiving focus circuit I (13) and receiving focus circuit II (14) can also be accomplished.

[0071] In the Figure, 21 designates an array type transmitter/receiver probe dedicated to ultrasonic imaging and 22 designates a rotating mechanism for rotating the probe around an axis vertical to the probe surface, thus providing the configuration in which a plurality of ultrasonic pulse echo tomographic images necessary for positioning an irradiated object can be obtained. Respective elements of the probe 22 are connected to a transmission control circuit 23 and a receiving focus circuit 25 through a transmitting/receiving amplifier 24. The display circuit 30 is configured so that signals indicative of cavitation generation positions and generation intensity which are detected by the receiving focus circuit I (13) and receiving focus circuit II (14) are displayed while being superimposed on an obtained echo tomographic image.

[0072] In order to obtain good image resolution, the ultrasonic frequency band of the probe 21 is set to be $4f_0$ or higher. Structurally, harmonic components of, for example, frequencies $4f_0$, $6f_0$ and $8f_0$ and harmonic components of subharmonic components of, for example, $9f_0/2$ which are radiated by cavitation may be detected by the probe 21 rather than the group of elements 1-1 to 1-N and group of elements 2-1 to 2-M. Further, when the drive phase generating circuit I (11), drive phase generating circuit II (12) and drive signal generating circuits 7-1 to 7-N and 8-1 to 8-M are controlled by the irradiation unit main control circuit 20, pulse ultrasonic waves can be transmitted in synchronism with the transmission of imaging ultrasonic pulses by the array type transmitter/receiver probe 21 dedicated to ultrasonic imaging and focus positions of high-intensity ultrasonic waves for cavitation generation obtained through transmission by means of the elements 1-1 to 1-N and 2-1 to 2-M and reception by means of the probe 21 can be displayed while being superimposed on an echo tomographic image obtained through transmission and reception by means of the probe 21.

[0073] Since the efficiency of cavitation generation depends on the relative phase relation between the fundamental wave and the second harmonic wave, more highly efficient cavitation generation can be realized by controlling the drive signal generating circuits 7-1 to 7-N and 8-1 to 8-N such that the intensity of harmonic components and harmonic

components of subharmonic components which are radiated by cavitation is maximized and so the relative phase relation is optimized. When the optimization according to the intensity of the harmonic components or the harmonic components of subharmonic components is difficult to achieve or when this function is desired to be omitted, there is also available a method for realizing highly efficient cavitation generation during at least more than a certain fraction of time by performing irradiation while shifting the relative phase relation by $\pi/8$ to $\pi/4$ in respect of the second harmonic wave. Not only when the optimum relative phase relation is searched but also when the relative phase relation is shifted in accordance with a predetermined value, it is necessary to cause irradiation to continue for a constant time required for cavitation generation (typically, about 0.1 msec) or longer in one relative phase relation.

[0074] When observation of an ultrasonic irradiated object portion based on an echo tomographic image teaches that motion due to breathing of the object portion cannot be neglected and does matter, the irradiation focus is so controlled as to move in compliance with the motion of the object portion on the basis of a signal applied from the receiving focus circuit 25 to the irradiation unit main control circuit 20. When the motion of the object portion is so large that it exceeds the permissible range of irradiation focus or when tracking is difficult to achieve, the ultrasonic irradiation timing is controlled such that it is synchronized with breathing and ultrasonic irradiation is carried out within only a predetermined range of breathing timing, on the basis of a signal applied from a breathing detector 32 to the irradiation unit main control circuit 20.

[0075] Also, the efficient acoustic cavitation generating method of the present invention can be applied to improve drawing power possessed by the present embodiment practiced as an ultrasonic diagnostic apparatus. More particularly, by carrying out two-frequency superimposed ultrasound irradiation at relatively small intensity by using the group of elements 1-1 to 1-N and the group of elements 2-1 to 2-M and generating acoustic cavitation efficiently in an object imaged based on an ultrasonic pulse echo method using the probe 21 to emphasize an echo characteristic of the imaged object such as blood flow, a blood flow in a minute blood vessel or a low-speed blood flow can be imaged which can hardly be imaged even through the Doppler method when the ultrasonic pulse echo method using the probe 21 is employed alone.

[0076] Next, the ultrasonic transducer unit of the present embodiment will be described in greater detail with reference to Figs.4A, 4B and 5. As an example, Figs.4A and 4B show an array-type high-intensity ultrasonic transducer of 16 sectors x 2 tracks composed of groups of ultrasonic elements 1-1 to 1-N and 2-1 to 2-M. Fig.4A is a diagram showing the state of the transducer as seen from below and each group of elements associated with part of peripheral circuits, and Fig.4B is a diagram showing a sectional structure of the transducer.

[0077] This focusing type high-intensity ultrasonic transducer has a geometrical focus so that it may be allowed to scan focal points by means of a necessarily minimum number of elements $N + M$. In the present embodiment, the geometrical focus can be given by disposing groups of ultrasonic elements 1-1 to 1-N and 2-1 to 2-M on a spherical shell 33 made of light metal. The spherical shell 33 made of light metal, containing as a main constituent magnesium or aluminum, has an ultrasonic irradiating surface side which is a concave surface forming part of a sphere having its center at a geometrical focal point F and has a back side which has a polyhedral form polished to allow ultrasonic elements of piezoelectric ceramic to be bonded thereto. Thanks to high thermal conductivity, the spherical shell 33 of light metal is effective to cool piezoelectric elements during high-intensity ultrasonic irradiation and also acts as an ground electrode of each piezoelectric element. The shell also forms part of a transducer housing and it is provided with a conduit 33 of cooling fluid for depriving heat generated during high-intensity ultrasonic irradiation and mounted with a water bag 35 containing degassed water which makes easy acoustic coupling to the surface of the body. Since the light alloy, containing as a main constituent magnesium or aluminum, has an acoustic impedance which is intermediate between those of the piezoelectric ceramic and degassed water for coupling, the shell 33 serves also as an acoustic matching material between the two.

[0078] In the present embodiment, the thickness of the spherical shell 33 is so selected as to be a half wavelength of the fundamental wave or one wavelength of the second harmonic wave but the thickness may be changed for the part of the fundamental wave elements 1-1 to 1-N and the part of the second harmonic wave elements 2-1 to 2-M to take a value of 1/4 wavelength of each of the frequencies, thereby improving transmitting/receiving characteristics of the pulse-like ultrasound.

[0079] Accommodated in a circular hole formed in a central portion of the array shown in Figs.4A and 4B is a pulse echo transmitter/receiver probe 21 dedicated to ultrasonic imaging. The basic structure of the probe 21 is identical to that of a sector scanning type array probe used in the ultrasonic diagnostic apparatus and in the present embodiment, its central frequency is set to be twice the resonance frequency of the second harmonic wave elements 2-1 to 2-M. In order to enable a single one-dimensional array probe to image a plurality of tomogram planes, the probe 21 is rotatable relative to the transducer housing 33 and is rotated about the central axis of the transducer by means of the rotating mechanism 22.

[0080] In the present embodiment, the transducer has a geometrical focal length of about 12 cm, an array outer diameter of about 12cm, an inner diameter of about 4 cm and a diameter of about 8 cm of a circle for sectioning two tracks. Since the outer track for generating the fundamental wave has a diameter which is about twice the diameter of

the inner track for generating the second harmonic wave, the diameter of a fundamental wave spot substantially equals that of a second harmonic wave spot on the focal plane and the generation of cavitation based on the synergistic effect of the two frequencies can be carried out effectively.

[0081] When for the 12 cm array outer size the inner diameter is set to 3 cm and the diameter of the circle sectioning the two tracks is set to 6 cm, the outer track and the inner track are almost exactly analogous to each other in terms of the ratio between wavelengths and therefore a peak acoustic pressure distribution of the second harmonic wave approximately equals that of the fundamental wave on the focal plane.

[0082] With the present configuration, the fundamental wave and the second harmonic wave are irradiated simultaneously on only the vicinity of the focal point and therefore by setting the focal point in an irradiated object, cavitation can efficiently be generated locally only in the vicinity of the focal point.

[0083] Fig.5 shows an example in which a rectangular array is used as the ultrasonic transducer unit in the present embodiment. In the Figure, parts having the same function and the same name as parts in Figs.4A and 4B are designated by identical numerals. An ultrasonic transducer formed of a rectangular piezoelectric ceramic having a minor side of 4 cm and a major side of 16 cm is divided into $2N + M$ elements and $2N$ elements on opposite ends of the minor side are electrically connected together to form an array transducer consisting of N electrically independent fundamental wave generating elements 1-1 to 1- N and M electrically independent second harmonic wave generating elements 2-1 to 2- M . An irradiation surface side of an acoustic matching layer 33 made of a light alloy, containing as a main constituent magnesium or aluminum, forms part of a cylindrical surface and its concaved portion is filled with an acoustic filler made of a polymer material which exhibits a acoustic speed comparable to or slower than that of water and which has the surface so formed as to be flat or convex, so that the transducer as a whole forms geometrical foci on a line segment $F'F''$.

[0084] The ultrasonic transducer according to an embodiment of Fig.5 has a basic structure which functions also as a linear scanning type or sector scanning type array probe used in the ultrasonic diagnostic apparatus. Accordingly, by using part of the basic structure shown in Fig.3 which is removed of the probe 21 dedicated to ultrasonic imaging and its rotating mechanism 22, the transmission control circuit 23, the transmitting/receiving amplifier 24 and the receiving focus circuit 25, an ultrasonic pulse echo tomographic image necessary for positioning an irradiated object can be obtained. But, like the ordinary linear scanning type or sector scanning type probe, this transducer can image only a tomogram plane which extends in a direction parallel to the major side. Since the fundamental wave generating elements electrically connected in common have a width in the minor side direction which is set to be about twice a width in the minor side direction (a direction orthogonal to the array arrangement direction) of the second harmonic wave generating element, a fundamental wave spot and a second harmonic wave spot expand substantially equally in the minor side direction on the focal plane and the generation of cavitation due to the synergistic effect of the two frequencies can be carried out efficiently. In the case of the present configuration, too, the fundamental wave and the second harmonic wave are synthesized in a medium and the two-frequency waves are irradiated simultaneously on only the vicinity of the focal point and therefore, by setting a focal point on an irradiated object, cavitation can efficiently be generated locally only in the vicinity of the focal point. In an application of sono-chemical reactions induced by the cavitation to the therapeutic purposes, this leads to an advantage that the possibility of producing side effects at a portion frontally or backwardly away from an irradiated object can be substantially eliminated.

[0085] Referring to Fig.6, an example will be described in which by irradiating ultrasonic waves by means of the ultrasonic irradiation apparatus comprised of the ultrasonic transducer of Figs.4A and 4B and having the overall configuration of Fig.3, a sono-chemical effects are practically generated with efficiency in an aqueous solution. An experiment was conducted for a sono-chemical reaction in which molecular iodine was released from iodide ions by oxidation. An aqueous solution of potassium iodide added with chloral hydrate was poured in a test tube made of polystyrene (having higher transparency for ultrasound than glass), placed at the focal point of the focusing type ultrasonic transducer and irradiated with ultrasound. Concentration of released iodine was determined by absorbance and the rate of the sono-chemical reaction was determined from the absorbance.

[0086] In Fig.6, the sono-chemical reaction rate obtained when a fundamental wave of 750 kHz and a second harmonic wave of 1.5 MHz are irradiated simultaneously while the sum of power levels of the two waves being kept to be constant are plotted in relation to the ratio of fundamental wave power to total ultrasonic power. In that case, the sum of the fundamental frequency ultrasonic wave intensity and second harmonic ultrasound intensity was about 30 W/cm² in the vicinity of the focal point. While the sono-chemical reaction rate for the fundamental wave or second harmonic wave alone was zero within the experimental error range, the synergistic effect obtained by the simultaneous irradiation of the two waves was remarkable, and especially, high sono-chemical reaction rate was obtained at a ratio of the fundamental wave power to the total ultrasonic power which was between 0.2 and 0.8 (fundamental wave:second harmonic wave between 1:4 and 4:1).

[0087] Referring now to Figs.7 to 20, an embodiment will be described in greater detail wherein wave transmitter elements used for transmission/reception of the fundamental wave are identical to those used for transmission/reception of the second harmonic wave.

[0088] To describe a transmitter element, it is formed of a piezoelectric material and a material having an acoustic impedance equal to that of the piezoelectric material and its total thickness is set to correspond to a half wavelength of the fundamental wave so that not the total thickness but a partial thickness region may be driven piezoelectrically, thereby making the transmitter element active at both the fundamental frequency and the second harmonic which is twice the fundamental frequency. This expedient is for avoiding such inconvenience that the wave transmitter element becomes piezoelectrically inactive at frequencies of even multiples of the fundamental resonance frequency if the thickness as a whole is driven piezoelectrically as in the ordinary piezoelectric element.

[0089] Also, the drive circuit to be operated as usual with a drive waveform in the form of a sine wave or a rectangular wave having good symmetry is unsuitable to generate ultrasonic waves of frequencies of even multiples from the piezoelectric vibrator element because the drive waveform does not contain frequencies of even multiples of the fundamental frequency and therefore it is necessary to contrive a drive circuit which is operated with a drive waveform in the form of a waveform containing intended frequency components. A first expedient is such that when a rectangular wave is used as the drive waveform, the ratio between times for the rectangular wave to stay at high and low two potential levels is not set to be 1:1 in the usual case but is set to be asymmetrical. A second expedient concerning the drive circuit is such that in place of a rectangular wave, a sawtooth wave or a stepped wave simulating the sawtooth wave is used as the drive waveform. A third expedient concerning the drive circuit is such that a capacitor and an inductance are added to the piezoelectric vibrator element to form a resonance circuit which resonates at both the fundamental frequency and the second harmonic and this resonance circuit is driven by a circuit driven at the fundamental frequency and by a circuit driven at the second harmonic.

[0090] In connection with a piezoelectric thickness vibrator element formed of a piezoelectric material and a material having an acoustic impedance equal to that of the piezoelectric material and having a thickness of a half wavelength of the fundamental wave, a structure as shown in Fig.8 is considered wherein a region corresponding to an acoustic thickness (a thickness corrected for non-uniformity when the vibrator element is not uniform for the sound speed of the resonance mode in question) of α measured from an end is driven piezoelectrically. Of the piezoelectric structure, a portion 71 driven piezoelectrically and a portion 72 not driven piezoelectrically are united acoustically by sintering or by means of a high-intensity bonding agent. In an example of Fig.8, an electric field is applied across an electrode 74 covering the portion 72 and an electrode 73. The portion 72 covered with the electrode 74 stands for the portion which is not driven piezoelectrically.

[0091] Electromechanical conversion efficiencies ε_0 and ε_1 exhibited by this piezoelectric vibrator element at the fundamental frequency and the second harmonic are expressed by

$$\varepsilon_0 = E \sin^4 (\pi \alpha / 2) \quad (1)$$

$$\varepsilon_1 = E \sin^4 \pi \alpha \quad (2)$$

where E is a constant determined by the material and the like. The usual structure in which the whole thickness is driven piezoelectrically corresponds to the case of $\alpha = 1$ and in this case, from (Equation 1) and (Equation 2), $\varepsilon_0 = E$ and $\varepsilon_1 = 0$ stand, indicating that while the fundamental wave can be converted, the second harmonic wave cannot be converted. The reason is because under the resonance state at the second harmonic, when a half of the thickness is distorted in the compression direction, the remaining half is required to be distorted in the expansion direction but this structure is allowed to be driven in only the mode in which the whole thickness is distorted uniformly in the compression direction or the expansion direction. Contrarily, for $\alpha = 2/3$, to $\varepsilon_0 = \varepsilon_1 = 9/16E$ is obtained from (Equation 1) and (Equation 2), indicating that the fundamental wave and the second harmonic wave can both be converted with the same conversion efficiency.

[0092] The drive waveform will now be described by referring first to the case of a rectangular wave. Power ζ_0 and power ζ_1 of the fundamental frequency component and second harmonic component contained in a rectangular wave in which the ratio between times for the rectangular wave to stay at high and low two potential levels is $\beta:(1 - \beta)$ are expressed by

$$\zeta_0 = F \sin^2 \pi \beta \quad (3)$$

$$\zeta_1 = (F/4) \sin^2 \pi \beta \quad (4)$$

where F is a constant determined by a difference between the high and low two potential levels, that is, the amplitude or the like. The usual rectangular wave having good symmetry corresponds to the case of $\beta = 1/2$ but in this case, from (Equation 3) and (Equation 4), $\zeta_0 = F$ and $\zeta_1 = 0$ stand, indicating that the fundamental frequency component is contained but the second harmonic component is not contained. Contrarily, for $\beta = 1/4$, from (Equation 3) and (Equation 4), $\zeta_0 = F/2$ and $\zeta_1 = F/4$ stand, indicating that a drive waveform containing both the fundamental frequency component and the second harmonic component can be obtained. At that time, the magnitude of ζ_i is maximized.

[0093] Next, the case where a sawtooth wave or a stepped wave simulating the sawtooth is used as the drive waveform will be described. Since it is well known that the sawtooth wave has frequency components of even multiples of the fundamental frequency, the stepped wave simulating the sawtooth wave will be described herein in greater detail. Power η_0 and power η_1 of the fundamental frequency component and second harmonic component contained in a stepped wave as shown in Fig.10 in which the ratio between times for the stepped wave to stay at either one of high and low two potential levels and an intermediate potential level is $\gamma:(1 - \gamma)$ are expressed by

$$\eta_0 = G \sin^4 (\pi\gamma/2) \quad (5)$$

$$\eta_1 = (G/4) \sin^4 \pi\gamma \quad (6)$$

where G is a constant determined by a difference between the high and low two potential levels, that is, the amplitude and the like. The usual rectangular wave having good symmetry corresponds to the case of $\gamma = 1$ but in this case, from (Equation 5) and (Equation 6), $\eta_0 = G$ and $\eta_1 = 0$ stand, indicating that the fundamental frequency component is contained but the second harmonic component is not contained. Contrarily, for $\gamma = 1/2$, $\zeta_0 = \zeta_1$ is obtained from (Equation 3) and (Equation 4), indicating that a drive waveform containing the fundamental frequency component and the second harmonic component equally can be obtained.

[0094] As shown in Fig.11, when a circuit, in which a capacitor is connected in parallel with a piezoelectric vibrator element to provide a total capacitance C (43) and besides inductances L (44) and μL (45) and a capacitance C (46) are added, can be assumed to have terminals 41 and 42 connected to a drive circuit having a sufficiently low output impedance, electrical impedances Z1 and Z2 as viewed from the terminals 41 and 42 can be expressed by

$$Z_1 = D/(1 + v - \mu v \omega^2 CL) \quad (7)$$

$$Z_2 = D/v/(1 - \omega^2 CL) \quad (8)$$

where ω represents angular velocity and

$$D = [1 - (1 + v + \mu v) \omega^2 CL + \mu v \omega^4 C^2 L_2]/j \omega C \quad (9)$$

stands when j represents imaginary unit. For $\mu = 16/9$ and $v = 9/25$, from the above Equations,

$$Z_1 = D'/(17/8 - (\omega^2 CL)) \quad (10)$$

$$Z_2 = D'/[9/16(1 - \omega^2 CL)] \quad (11)$$

$$D' = (5/8 - \omega^2 CL)/(5/2 - \omega^2 CL) \quad (12)$$

are obtained. At that time, on the basis of (Equation 12), Z_1 and Z_2 are both minimized when $\omega^2 CL = 5/8$ or $5/2$. In other words, a circuit can be obtained which is characteristic of resonating at two frequencies being at a ratio of 1:2. On the basis of (Equation 11), Z_1 and Z_2 are maximized at $\omega^2 CL = 17/8$ and 1, respectively, and therefore it is advantageous to construct the circuit such that the terminals 41 and 42 are driven at the fundamental frequency and the second harmonic, respectively.

[0095] The overall configuration of an embodiment of an ultrasonic irradiation apparatus according to the present invention using the wave transmitter element contrived as above and having a function monitoring the acoustic cavitation generating position is shown in Fig.7, the configuration of element drive circuit unit is shown in Figs.12 and 13, and the configuration of ultrasonic transducer unit is shown in Figs.14A and 14B.

[0096] This embodiment is identical to the embodiment of Fig.3 with the exception that the wave transmitting element is used in common to the fundamental wave and the second harmonic wave. Information concerning ultrasonic irradiation therapeutic strategy is input from key input means 31 to an irradiation unit main control circuit 20 and on the basis of the information, irradiation focus/code signals for defining focus positions/acoustic pressure distribution forms are applied from the irradiation unit main control circuit 20 to a drive phase generating circuit 11. Phases for drive of transducer elements for irradiating the generated fundamental wave and second harmonic wave are applied to drive signal generating circuits 7-1 to 7-N (N being the total number of transducer independent elements), respectively. Control signals for drive amplitudes of the fundamental wave and the second harmonic wave are supplied from the irradiation unit main control circuit 20 to the drive signal generating circuits 7-1 to 7-N. Generated drive signals are supplied to element drive circuits, 3-1 to 3-N, to drive a group of transducer elements, 1-1 to 1-N, for irradiation. The drive amplitudes can also be controlled by signals applied from the irradiation unit control circuit 20 directly to the element drive circuits 3-1 to 3-N, thereby ensuring steady and easy operation of emergency stop of ultrasonic irradiation upon occurrence of abnormality.

[0097] Fig.12 shows the configuration of a circuit of one element of the element drive circuits, 3-1 to 3-N, and Fig.13 shows the configuration of a push-pull type switching circuit, forming a part of the circuit shown in Fig. 12. Output ports of a fundamental wave driver 47 and a second harmonic wave driver circuit 48 are connected to each element through a circuit which has the basic configuration of Fig.11 and which resonates at the fundamental frequency f_0 and the second harmonic $2f_0$. In the Figure, capacitance C and inductance L set up a combination which resonates at the fundamental frequency f_0 . In other words,

$$(2\pi f_0)^2 CL = 1 \quad (13)$$

stands.

[0098] A switching circuit in Fig.13 is so configured that the connections of a constant potential source 49 on the low potential side (in this case, earth potential) and a constant potential source 50 on the high potential side to an output terminal 52 are switched on and off by means of switching elements 53 and 54, respectively. The output terminal 52 is connected through a capacitor 58 to deliver only AC components. For stabilization of power supply potential, a capacitor 59 is connected between the constant potential sources 49 and 50. An input terminal 51 is connected directly to a gate of the switching element 53 on the ground potential side but is connected through a capacitor 55 to a gate of the switching element 54 on the hot potential side. DC level on the gate of the switching element 54 is controlled by the action of a Zener diode 56 having a Zener potential level of a gate drive signal amplitude (the difference between maximum potential and minimum potential) such that the maximum potential of the gate drive signal equals the potential of the constant potential source 50 on the high potential side. In order to prevent runaway of the DC level, a resistor 57 is connected in parallel with the Zener diode 56.

[0099] The irradiation transducer configured of the group of elements 1-1 to 1-N operates also as a receiving transducer for detection of cavitation generated in an irradiated object. Signals received by the individual elements are removed of components of the irradiation signal band by means of band-reject filters, 5-1 to 5-N, then led to receiving amplifiers, 9-1 to 9-N, so as to be amplified thereby and applied to a receiving focus circuit 13. Since the output port of each of the element drive circuits 3-1 to 3-N is connected to the low impedance circuit through the resonance circuit operative to resonate at the frequencies f_0 and $2f_0$ as described above, the output impedance of the drive circuit will not act as a shunt at frequencies detuned from the respective f_0 and $2f_0$ to interfere the receiving sensitivity.

[0100] Display of an echo tomographic image by the array type transmitter/receiver probe 21 dedicated to ultrasonic imaging and motion due to breathing of the object portion can be dealt with in the same way as that in the embodiment of Fig.3 and will not be described.

[0101] Referring now to Figs.14A and 14B, the difference between the ultrasonic transducer unit of the present embodiment and the ultrasonic transducer unit shown in Figs.4A and 4B. A diagram of Fig.14A showing the state of the transducer as seen from below and the elements associated with part of peripheral circuits is the same.

[0102] In a piezoelectric element shown in Fig.14B, a plate-type piezoelectric ceramic having a thickness of $1/3$ wavelength of the fundamental wave (= $2/3$ wavelength of the second harmonic wave) is strongly bonded, by a bonding agent of relatively small thermal expansion coefficient, with a plate which is made of the same piezoelectric ceramic material but is made to be essentially piezoelectrically inactive by short-circuiting electrodes or without applying the electrode polarizing processing and which has a thickness of $1/6$ wavelength of the fundamental wave. This piezoe-

electrically inactive plate may also be made of a piezoelectrically inactive material such as zinc or copper having an acoustic impedance which is approximately equal to that of the piezoelectric ceramic. With the configuration as above, an ultrasonic vibrator element having piezoelectric activity at both the frequencies of the fundamental and second harmonic is realized. Illustration of the drawing differs only in that the wave transmitter elements 1-1 and 1-2 are depicted identically in thickness.

[0103] Even with a structure in which a spherical shell 33 forming part of the housing is not made of light alloy but is made of zinc or copper, having a thickness of $1/6$ wavelength of the fundamental wave and a piezoelectric ceramic element having a thickness of $1/3$ wavelength of the fundamental wave is bonded, the piezoelectric activity can be obtained at the frequencies of both the fundamental and the second harmonic but the structure of Figs.14A and 14B is slightly superior from the view of acoustic separation between adjacent elements.

[0104] Accommodated in a circular hole at an array central portion shown in Figs.14A and 14B is a pulse echo transmitter/receiver probe 21 dedicated to ultrasonic imaging as in the case of Figs.4A and 4B.

[0105] Fig.15 shows an example in which a rectangular array is used as the ultrasonic transducer unit of the present embodiment. Like the relation of Figs.14A and 14B to Figs.4A and 4B, the drawing illustration in this case differs from Fig.5 only in that wave transmitter elements 1-1 to 1-2 are depicted identically in thickness. Among the groups of piezoelectric elements 1-1 to 1-N and 2-1 to 2-N and 3-1 to 3-N, element 1-1 to 1-N are mutually connected electrically to the corresponding elements, 3-1 to 3-N, but can be driven at different phases relative to the elements, 2-1 to 2-N, making it possible to move the focal point in the depth direction according to the focusing along the minor side.

[0106] In the foregoing, the circuit configuration capable of superimposing the second harmonic wave on the fundamental wave in a desired phase relation thereto at a desired amplitude ratio and the apparatus configuration including the same have been described but if it suffices that the limitation is relieved to allow only a second harmonic wave being in a constant phase relation to the fundamental wave to be superimposed thereon, the superimposition of the second harmonic wave can be effected with a simpler circuit configuration. When a waveform as shown in Fig.9 is desired to be obtained as a result of the superimposition, that is, when the second harmonic wave is superimposed on the fundamental wave in a cosine-wave to cosine-wave relation, the push-pull type circuit as shown in Fig.13 may be used by one circuit per element. Namely, when the two switching elements 53 and 54 constituting the push-pull type circuit are controlled such that a state of rendering 53 on and rendering 54 off and a state of rendering 53 off and rendering 54 on are repeated, an ultrasound at the fundamental frequency and an ultrasound at the second harmonic frequency can be irradiated at a time by controlling the ratio between times for the waveform to stay at the respective states to a ratio which is not 1:1 but is of an unequal ratio such as 1:3.

[0107] When a waveform as shown in Fig.10 is desired to be obtained as a result of the superimposition, that is, when the second harmonic wave is desired to be superimposed on the fundamental wave in a sine-wave to sine-wave phase relation, a circuit configuration as shown in Fig.16 is needed. One circuit of this type is used per element to drive the piezoelectric vibrator element. By controlling gate input terminals 66, 65, 68 and 67 of drive circuits composed of switching element groups 54, 53, and 63 with 64, three groups per piezoelectric vibrator element, adapted to switch on and off the electrical connection between respective three constant potential sources 50, 60 and 49 and the piezoelectric vibrator element in accordance with a time chart shown in Fig.17, a drive waveform having steeper rise than fall shown in Fig.11 can be obtained as an output waveform at a terminal 52. By changing the time chart, a drive waveform can also be obtained which is steeper when falling than when rising. In contrast with the case obtaining the drive waveform of Fig. 17, in which the gate input terminal 67 remained off, the gate control of terminal 67 similar to that applied to the gate input terminal 68 in the case of Fig.17 is carried out. According to the circuit configuration of Fig.16, since the drive waveform which can be obtained with the Fig.13 circuit configuration can of course be obtained, drive can afford to proceed based on a second harmonic superimposed wave which is desirably defined in at least phase relation. The input terminal 67 is connected directly to a gate of the switching element 63 but the other input terminals 65, 66 and 68 are connected to gates of the switching elements 53, 54 and 64, respectively, through circuits similar to the gate peripheral circuit of the switching element 54 in Fig.13. In order to prevent reverse currents of the switching elements 63 and 64, these elements are connected in series with diodes 61 and 62.

[0108] In the foregoing embodiment, an example has been described wherein an electronic scanning type array transducer being complicated in configuration but considered to be excellent for general purpose use is employed as the ultrasonic transducer; but the application range of the present invention is not limited thereto and may also be applied to a single focus manual scanning type transducer or a single focus mechanical scanning type transducer, an example of which is shown in sectional form in Fig.18. A comparative example of a non-focus type plane wave transducer is shown in sectional form in Fig.19, which is not part of the present invention. In the Figures, an electrode 73 is connected to a coaxial connector 76 by a lead wire 75. A housing 77 made of a metal of high thermal conductivity such as copper or aluminum is provided with a water conduit 78 for cooling to deprive heat generated by the piezoelectric device during ultrasound generating operation or, if necessary, cool an object irradiated with ultrasonic waves. In Fig. 18, the thickness of the central part of the acoustic lens 79 made of magnesium or a magnesium-based alloy is set to be a $1/4$ or $1/2$ wavelength in the fundamental frequency, thus insuring high efficiency. In Fig. 19, the thickness of a flat

plate 79 made of light metal such as magnesium or aluminum is set to be a $1/4$ or $1/2$ wavelength in the fundamental frequency, thus insuring high efficiency. The thickness of a central portion of the acoustic lens 80 in Fig.18 made of magnesium or a magnesium-based alloy is set to measure similarly.

[0109] Conventionally, in the case of the plane wave for which a high ultrasonic intensity level is hardly obtained, it was in effect impossible to generate cavitation sufficient for practical use in a nonstationary acoustic field, but the second harmonic wave superimposing method of the present invention succeeded in making the generation possible. Further, even by implanting a needle-shaped transducer, an example of which is shown in sectional form in Fig.20, in an affected part, therapeutic effects could be obtained. To prevent the ultrasound from being diffused, the tip conical part 81 is made of a material exhibiting a relatively slow sound speed.

[0110] In the foregoing, the embodiments have been described which make the generation of cavitation efficient by superimposing on the fundamental wave the second harmonic wave thereof but more efficient generation of cavitation can also be attained by superimposing a wave having a fourth, sixth or eighth harmonic of the fundamental wave on the aforementioned waves.

[0111] Next, other embodiments of the present invention will be described in greater detail with reference to Figs.21 to 24.

[0112] These embodiments, although the embodiment of Fig.19 is similar in this point, notice the fact that the phase rotation due to the diffraction effect can be neglected in near acoustic fields of plane waves and therefore if plane waves of the two frequency waves are added to each other in the respective near acoustic fields so that wave fronts of the two frequency waves may become parallel to each other, then the phase relation between the two frequency waves can be conditioned to be advantageous to the generation of acoustic cavitation over a wide region.

[0113] In connection with the ultrasonic therapeutic apparatus standing for an embodiment of the present invention, an example of the configuration of an intraoperative ultrasonic therapeutic transducer unit is shown in Fig.21. Planar piezoelectric devices 1 and 2f or generating the fundamental wave and the second harmonic wave, respectively, are mounted so as to oppose to each other in parallel. The two piezoelectric devices are respectively bonded to acoustic matching layers 79-1 and 79-2 each made of a magnesium-based alloy with sufficient acoustic strength. Heat generated during the generation of ultrasonic waves is led from the acoustic matching layers of high thermal conductivity to housings 77-1 and 77-2 each made of metal of high thermal conductivity and is deprived from the transducer unit through water conduits 78-1 and 78-2 for cooling. If necessary, this cooling function can also be used for the purpose of cooling the vicinity of the surface of an affected part standing for an object to be irradiated with ultrasound.

[0114] For example, when an affected part at a lobule 110 of the liver is remedied, the affected part is irradiated with ultrasonic waves of the fundamental frequency and second harmonic simultaneously from the both sides of the affected part while being sandwiched in between the planar piezoelectric devices 1 and 2. The distance between the planar piezoelectric devices 1 and 2 can be adjusted by means of a parallel moving mechanism 90 while keeping the parallelism. The distance between the surfaces of the acoustic matching layers 79-1 and 79-2 of the two piezoelectric devices is set in principle to be an integer multiples of a half wavelength of the fundamental wave. A space between each of the two acoustic matching layers and the lobule 110 of the liver may be filled, as necessary, with a jelly having the same osmotic pressure as the living body to assist the ultrasound transferring. A compact ultrasonic detector 21 is mounted in a small hole formed in a central portion of the piezoelectric device to detect higher harmonics and higher harmonics of subharmonics, these harmonics being generated in correspondence to the generation of acoustic cavitation. Based on detected signals, the irradiation intensity of the fundamental wave and the second harmonic wave is adjusted or the aforementioned distance between the surfaces of the acoustic matching layers 79-1 and 79-2 is adjusted finely for the purpose of attaining optimization.

[0115] Fig.22 shows an example of an intraoperative ultrasonic therapeutic transducer unit configured to generate the fundamental wave and the second harmonic wave simultaneously from a single piezoelectric device in contrast to Fig.21.

[0116] A reflection plate 92 made of, for example, stainless steel and having a thickness of an integer multiple of a half wavelength of the fundamental frequency wave is mounted to oppose planar piezoelectric devices for simultaneous generation of the fundamental wave and the second harmonic wave (71 and 72; they have the same configuration as that explained in connection with Fig.8) in parallel thereto. The planar piezoelectric devices are bonded to a thickness vibrator element plate 79 made of a magnesium-based or aluminum-based alloy and having a thickness of an integer multiple of the half wavelength of the fundamental wave, with sufficient acoustic strength. For example, when an affected part at a lobule 110 of the liver is remedied, the affected part is irradiated with ultrasonic waves of the fundamental frequency and second harmonic simultaneously from the planar piezoelectric devices while placing the affected part between the planar piezoelectric devices and the reflection plate 92. The distance between the planar piezoelectric devices and the reflection plate 92 can be adjusted by means of a parallel moving mechanism 90 while keeping the parallelism. The distance between the surfaces of the thickness vibrator element plate 79 and reflection plate 92 is set for optimization similarly to the aforementioned distance between the surfaces of 79-1 and 79-2.

[0117] With this configuration, acoustic fields substantially equal to the stationary acoustic fields set up between the

respective two planar piezoelectric devices 1 and 2 and the respective two acoustic matching layers 79-1 and 79-2 in the embodiment of Fig.21 can be formed between the thickness vibrator element plate 79 and the reflection plate 92. Since the reflection plate 92 can be designed to be much thinner than the housing 79-2 of planar piezoelectric device 2, this embodiment is superior in the point of ease of intraoperative use and in this respect the configuration of Fig.22 is more advantageous than the configuration of Fig.21.

[0118] The intraoperative ultrasonic therapeutic transducer shown in Fig.21 or 22 can substitute for each transmitter element 1 or 2 or each transmitter element 1 in the configuration of the ultrasonic therapeutic apparatus of the embodiment shown in Fig.3 or 7 to constitute an intraoperative ultrasonic therapeutic apparatus. The ultrasonic detector 21 in Fig.21 or 22 corresponds to the probe 21 in Fig.3 or 7.

[0119] Fig.23 shows an example of the configuration of a reactor of an ultrasonic chemical reaction apparatus according to an embodiment of the present invention. A reaction vessel 91 is filled with liquid, reactants or substrates for sono-chemical reaction as dissolved or scattered in the liquid is caused to flow in the reaction vessel 91 through an inlet 93, and a product stemming from a sono-chemical reaction, also dissolved or scattered in the liquid, is caused to flow out of the reaction vessel 91 through an outlet 94. When mutually parallel acoustic matching layers 79-1 and 79-2 constituting part of the inner wall of the reaction vessel 91 are made of magnesium-based light metal as in the embodiment of Fig.21, each layer has a thickness of $1/4$ wavelength or of $1/4$ wavelength added with an integer multiple of a half wavelength; but when the layers are made of stainless steel or quartz glass with the aim of insuring required chemical stability, each layer has a thickness of an integer multiple of the half wavelength. The distance between inner walls of the reaction vessel is set to an integer multiple of the half wavelength of the fundamental wave so as to meet the resonance condition. The illustrated example was so designed that this distance was selected to be one wavelength of the fundamental wave in order to allow anti-nodes of stationary wave acoustic pressure to occur not only in the vicinity of the inner wall but also a central portion of the vessel for both the fundamental wave and the second harmonic wave. The configuration of Fig.23 essentially superior in point of the generation of acoustic cavitation is also advantageous to the configuration of a bubble generator.

[0120] Fig.24 shows an example of the configuration of a reactor of an ultrasonic chemical reaction apparatus or a bubble generator in which the fundamental wave and the second harmonic wave are generated from a single piezoelectric device at a time. A planar piezoelectric device capable of generating the fundamental wave and the second harmonic wave simultaneously is bonded, with sufficient acoustic strength, to thickness vibrator element plate 79 which is made of stainless steel or quartz glass, has a thickness of an integer multiple of a half wavelength of the fundamental wave and forms part of the outer wall of a reaction vessel 91. An outer wall 92 opposing the thickness vibrator element plate 79 in parallel thereto has a thickness which is also an integer multiple of the half wavelength of the fundamental wave and serves as a reflection plate. With this configuration, acoustic fields essentially equal to the stationary acoustic fields set up between the two acoustic matching layers 79-1 and 79-2 in the embodiment of Fig.23 can be formed between the thickness vibrator element plate 79 and the reflection plate 92.

[0121] Next, an embodiment of a cleaning apparatus for performing cleaning in a cleaning tank by irradiating the fundamental and the second harmonic wave will be described with reference to Fig.25.

[0122] There are provided a cleaning tank 102 for containing a liquid 101, for example, a semiconductor substrate cleaning liquid containing pure water or hydrogen peroxide and ammonia, a piezoelectric device 103 having its vibrator element surface bonded to the bottom of the cleaning tank 102, a flat plate 104 which is bonded to the piezoelectric device 103, is made of a solid state material having substantially the same acoustic impedance as the 103 and has an acoustic thickness in the vibration direction which is $1/2$ of that of the 103, waveform generators 105 and 106 adapted to generate electrical signals of resonance frequencies f_0 and $2f_0$, respectively, of a complex resonant type thickness vibrator element constituted by the 103 and 104, electrical signals delivered out of the waveform generators 105 and 106, and an amplifier circuit 107 which adds together the electrical signals delivered out of the waveform generators 105 and 106 and amplifies them to apply AC voltages to the piezoelectric device 103. With this configuration, ultrasonic waves of frequencies f_0 and $2f_0$ are irradiated on the cleaning liquid 101 contained in the cleaning tank 102.

[0123] In the ultrasonic cleaning apparatus configured as above, the vibrator element plate in the form of the bonded piezoelectric device 103 and flat plate 104 has substantially the same configuration as the piezoelectric thickness vibrator element explained previously in connection with Fig.8 and by performing excitation by means of the waveform generators 105 and 106 and the amplifier circuit 107, the fundamental wave f_0 and the second harmonic wave $2f_0$ can coexist in a region 108. When an object 109 to be washed, for example, a semiconductor substrate is placed in this region 108, acoustic cavitation is generated highly efficiently at a surface of the object to be washed and the surface of the object 109 to be washed can be washed by the acoustic cavitation.

[0124] Next, an embodiment of a cleaning apparatus for performing cleaning in a cleaning tank by irradiating the fundamental wave and the second harmonic wave from different vibrator elements will be described with reference to Fig.26.

[0125] There are provided a cleaning tank 102 for containing a liquid 101 for cleaning, a piezoelectric device 103' having its vibrator element surface bonded to one of bottom surfaces of the cleaning tank and being resonant at a

fundamental frequency f_0 and a piezoelectric device 103' disposed on the other bottom surface of the cleaning tank and being resonant at a second harmonic wave $2f_0$ of the f_0 ; and a waveform generator 105 for generating an electrical signal having a component of the frequency f_0 and a waveform generator 106 for generating an electrical signal having a component of the frequency $2f_0$ deliver electrical signals which are amplified by amplifiers 107' and 107'', respectively, and applied to the piezoelectric devices 103' and 103'' to vibrate them, thereby irradiating ultrasonic waves on the liquid 101 for cleaning. As a result, the fundamental wave f_0 and its second harmonic wave $2f_0$ can coexist in a region 108. When an object 109 to be washed, for example, a semiconductor substrate is placed in this region, acoustic cavitation is generated highly efficiently at the surface of the object 109 to be washed and the surface of the object 109 to be washed can be washed by the acoustic cavitation.

[0126] Next, an embodiment of a cleaning apparatus for performing cleaning by irradiating ultrasonic waves on a cleaning liquid jetted out of a jetting unit will be described with reference to Fig.27.

[0127] This embodiment comprises a pipe 112 for guiding a liquid 101 for cleaning, for example, pure water, a nozzle 113 attached to the tip of the pipe, a piezoelectric device 103 held inside the nozzle 113, a flat plate 104 which is made of a solid having approximately the same acoustic impedance as the 103 and has an acoustic thickness in the vibrator element direction which is 1/2 of that of the 103, waveform generators 6 for generating signals of resonance frequencies f_0 and $2f_0$, respectively, of a complex thickness vibrator element configured of the 103 and 104, and an amplifier circuit 107 by which signals delivered out of the waveform generators 105 and 106 are added together and amplified so as to be applied to the piezoelectric device 103.

[0128] In the ultrasonic cleaning apparatus configured as above, the vibrator element plate formed of the bonded piezoelectric device 103 and flat plate 104 has essentially the same configuration as the piezoelectric thickness vibrator element explained previously in connection with Fig.8 and when excitation is carried out by means of the waveform generators 105 and 106 and amplifier circuit 107, the fundamental wave f_0 and its second harmonic wave $2f_0$ can coexist in a region 120 jetted out of the nozzle 113. When the cleaning liquid 101 is emitted from the nozzle 113 toward a rotating or stationary stage 119, there results highly efficient generation of acoustic cavitation at the surface of an object 121 to be washed, for example, a semiconductor substrate within the region 120 and the surface of the object 121 to be washed can be washed by this acoustic cavitation.

[0129] Results from evaluation of chemical cleaning effects brought about by the embodiments of the ultrasonic cleaning apparatus of Figs.25 to 27, especially, of Fig.25 will be described.

[0130] As an example of chemical cleaning, a semiconductor substrate was washed through oxidation by using ammonia and hydrogen peroxide. Since the progress of oxidation in the semiconductor substrate stopped as it reached a constant depth and was difficult to quantify, a substance exhibiting color reaction through oxidation was held at a position in a cleaning container where the semiconductor was held and the velocity of oxidation of the substance due to irradiation of the ultrasonic waves was measured so as to be used as an index of efficiency of cleaning. Experiments were conducted in respect of a reaction in which triiodide ions I_3^- were generated from iodine ions I_2^- through oxidation. An aqueous solution in which potassium iodide was added with chloral hydrate was contained in a bag made of polyethylene and having a thickness of 0.03 mm, and the bag was held at the semiconductor holding position and irradiated with the ultrasonic waves. Concentration of the generated triiodide ions was determined by an absorbance and oxidation rate was determined from a value of the absorbance. Oxidation rate obtained when a fundamental wave at 750kHz and a second harmonic wave at 1.5MHz were irradiated simultaneously while the sum of power levels of the two ultrasonic waves being kept to be constant was plotted relative to the ratio of the power at the fundamental frequency to the total ultrasonic power to obtain oxidation rate of the same characteristics as those explained previously in connection with Fig.6. In this case, the sum of ultrasonic intensity levels of the fundamental wave and the second harmonic wave at the location where the oxidation occurred was about 30W/cm². With the fundamental wave or the second harmonic wave alone used, the oxidation rate was zero within the experimental error range but the synergistic effects obtained when the two frequency waves were irradiated at a time were remarkable and especially when the ratio of the power at the fundamental frequency to the total ultrasound power was 0.2 to 0.8 (fundamental wave: second harmonic wave = 1:4 to 4:1), high oxidation rate was obtained.

[0131] When the acoustic power ratio between the fundamental wave and the second harmonic wave is fixed to 1:1 and the phase relation between the fundamental wave and the second harmonic wave is changed, the oxidation rate is plotted to obtain results as shown in Fig.28. In this case, too, the sum of ultrasonic intensity levels of the fundamental wave and second harmonic wave at a location where oxidation occurred was about 30 W/cm². In the Figure, abscissa represents values of α when letting the fundamental wave be $\sin(2\pi f)$ and the second harmonic wave be $\sin(4\pi f)$. With the value of α being $(1/4)\pi$ to $(7/4)\pi$, high oxidation rate was obtained. Especially, for $\pi/2 \leq \alpha \leq \pi$, remarkably high oxidation rate was obtained, where $\alpha = \pi/2$ is a phase relation which maximizes the absolute value of negative peak acoustic pressure and $\alpha = \pi$ is a phase relation which makes the fall of acoustic pressure steepest.

[0132] The ultrasonic cleaning apparatus shown in the present embodiment was also effective for cleaning using hydrogen peroxide and sulfuric acid, cleaning using trichloro acetic acid and cleaning using chloral hydrate.

[0133] Next, an example in which the present invention is applied to sterilization of liquid will be described with

reference to Fig.29.

[0134] The present embodiment comprises a processing tank 201, a liquid pouring port 202, a liquid discharge port 203, valves 204, a bubble injection port 205, a piezoelectric device 206 having its vibrator element surface bonded to the bottom of the processing tank 201, a flat plate 207 which is bonded to the 206, has substantially the same acoustic impedance as the 206 and is made of a solid having the same acoustic impedance as the 206 and an acoustic thickness in the vibrator element direction measuring 1/2 of that of the piezoelectric device 206, waveform generators 208a and 208b for generating electrical signals of resonance frequencies f_0 and $2f_0$ of a complex resonance thickness vibrator element configured of the 206 and 207, and an amplifier circuit 209 for adding together and amplifying electrical signals delivered out of the waveform generators 208a and 208b.

[0135] Here, the relation between the piezoelectric device 206 and flat plate 207 is defined similarly to the embodiment of Fig.25 as described in connection with Fig.8. When AC voltages of the resonance frequencies f_0 and $2f_0$ are applied to the piezoelectric device 206 to excite it and ultrasonic waves are irradiated on the liquid in the processing tank 201, the fundamental wave f_0 and its second harmonic wave $2f_0$ can coexist in the liquid in the processing tank. Through this, acoustic cavitation is generated efficiently in the processing tank and sterilization of the liquid can be carried out.

[0136] At that time, if gas species such as air is injected from the bubble injection port 205, then a cavitation core is allowed to exist stably and the effect of sterilization will be less degraded even when the ultrasonic waves are irradiated for a long time. By adjusting the degree of opening of the valves and timing therefor, the throughput and processing time of the liquid can be changed.

[0137] In the case where the composition of the liquid is allowed to be changed, the sterilization effect per hour can be improved by adding to the liquid a sono-chemical activation substance including a dye in porphyrin-family such as hematoporphyrin or chlorin or a halogenoid compound such as chloral hydrate or tetrachloro acetic acid.

[0138] Like the embodiment of Fig.26, a processing apparatus for performing sterilization in a processing tank by irradiating the fundamental wave and the second harmonic wave from different locations can be provided and an embodiment to this effect will be described with reference to Fig.30.

[0139] The overall configuration of a liquid processing apparatus is similar to Fig.29 and differs therefrom only in that vibrator element surfaces of an ultrasonic vibrator element 206a resonant with a fundamental frequency f_0 and an ultrasonic vibrator element 206b resonant with a second harmonic wave $2f_0$ are independently bonded to the side wall of a processing tank 201, and electrical signals delivered out of a waveform generator 208a for generating an electrical signal having a component of the frequency f_0 and a waveform generator 208b for generating an electrical signal having a component of second harmonic of the f_0 are independently amplified by amplifiers 209a and 209b, respectively, to apply AC voltages to the ultrasonic vibrator elements 206a and 206b.

[0140] When ultrasonic waves are irradiated into the processing tank 1 by means of the ultrasonic vibrator elements 206a and 206b, the fundamental wave f_0 and its second harmonic wave $2f_0$ are allowed to coexist in the processing tank. Through this, acoustic cavitation occurs efficiently in the processing tank and sterilization of the liquid can be carried out.

Claims

1. An apparatus for generating ultrasonic waves, comprising:

means (1 to 4, 7, 8, 11, 12, 20) for simultaneously irradiating an object with a continuous ultrasonic fundamental wave having a fundamental frequency f_0 and a continuous ultrasonic second harmonic wave having the frequency $2f_0$ of the second harmonic of the fundamental frequency,

characterised in that

said fundamental wave and said second harmonic wave are both focused to the same focus and the intensity of the second harmonic wave at the focus is larger than 1/4 and less than four times the intensity of the fundamental wave.

2. An apparatus according to claim 1, **characterised in that** an ultrasonic transmitter is provided which includes a transmitter element (1-1...1-N) for generating the fundamental wave and another transmitter element (2-1...2-M) for generating the second harmonic wave, said transmitter elements being independent of each other, and **in that** each of said elements is driven by an independent signal voltage, respectively.

3. An apparatus according to claim 2, **characterised in that** said ultrasonic transmitter is an array including a plurality of transmitter elements (1-1...1-N) for generating the fundamental wave and a plurality of transmitter elements

(2-1...2-M) for generating the second harmonic wave.

4. An apparatus according to claim 1, **characterised in that** the waveform of the second harmonic wave is $-\sin(4\pi ft)$ and the waveform of the fundamental wave is $\sin(2\pi ft)$.

5. An apparatus according to claim 1, **characterised in that** an ultrasonic imaging unit (21...25, 30) is provided which is so configured as to form an ultrasonic echo image of the irradiated object by transmitting and receiving a pulse wave having a higher frequency than the second harmonic wave.

6. An apparatus according to claim 1, **characterised by** means (5, 6, 9, 10, 13, 14) for receiving ultrasonic waves having an even multiple of the frequency of the second harmonic wave and being generated by cavitation at the object irradiated by the fundamental wave and the second harmonic wave.

7. An apparatus according to claim 1, **characterised in that** the continuous ultrasound fundamental wave and the continuous ultrasound second harmonic wave are irradiated simultaneously from the same piezoelectric element (1-1...1-N) toward the same object.

8. An apparatus according to claim 7, **characterised in that** the piezoelectric element (71, 72) is made of a piezoelectric material and a material having the same acoustic impedance as the piezoelectric material and having an acoustic thickness of a half wavelength of the fundamental wave, and **in that** the piezoelectric element (71, 72) has a thickness of substantially $2/3$ of the acoustic thickness driven piezoelectrically.

9. An apparatus according to claim 8, **characterised in that** the piezoelectric element (71, 72) has a first region (72) corresponding to substantially $1/3$ of the acoustic thickness and a second region (71) corresponding to substantially $2/3$ of the acoustic thickness which regions are bonded together, and **in that** only said second region (71) is driven piezoelectrically.

10. An apparatus according to claim 7, **characterised in that** a push-pull circuit (3-1...3-N) for driving said piezoelectric element (1-1...1-N) is provided, having two switching elements (53, 54, 63, 64), one of which is rendered on and the other is rendered off in one state of the circuit, the on/off rendering being inverted in another state, said states being repetitively assumed by said circuit, and the ratio between times for the respective states to persist being substantially $1:3$ or $3:1$.

11. An apparatus according to claim 10, **characterised in that** a drive circuit (3-1...3-N) is provided which includes three DC constant potential sources (49, 50, 60) and switching elements (53, 54, 63, 64) provided in three groups per one piezoelectric element (1-1...1-N) for switching on/off the electrical connection between each of said constant potential sources and said piezoelectric element.

12. An apparatus according to claim 1, **characterised by** a first circuit (47) for driving a piezoelectric element (1-1...1-N) at the fundamental frequency and a second circuit (48) for driving said piezoelectric element at the second harmonic of the fundamental frequency, said piezoelectric element being connected to said first circuit (47) through an inductor (44) having an inductance of $5/8L$ and to said second circuit (48) through an inductor (45) having an inductance of $10/9L$ and through a capacitor (46) connected in series with this inductance and having a capacitance of $9/25C$, where the total capacitance of said piezoelectric element and another capacitor (43) connected in parallel thereto is C and an inductance resonant with the total capacitance at the fundamental frequency is L .

13. An apparatus according to claim 1, **characterised in that** wave fronts of said two frequencies are rendered substantially parallel to each other.

14. An ultrasonic cleaning apparatus having an apparatus for generating ultrasonic waves according to claim 1 for irradiating said object through a medium of a liquid.

15. An apparatus according to claim 14, **characterised by** a cleaning tank (102) for holding the irradiated object (109, 121).

16. An apparatus according to claim 14, **characterised by** a jetting unit (113) for ejecting a liquid medium (120) through which said ultrasonic waves are irradiated on said object (109, 121).

17. An apparatus according to claim 1, **characterised in that** the waveform of the second harmonic wave is $\sin(4\pi ft + \alpha)$ and the waveform of the fundamental wave is $\sin(2\pi ft)$ where α is a real number which is more than $(1/4)\pi$ to less than $(7/4)\pi$.

18. A liquid sterilising apparatus, having an apparatus for generating ultrasonic waves according to claim 1.

19. An apparatus according to 14 or 18, **characterised by** an ultrasonic thickness vibrator element with a laminar structure of a piezoelectric device (103, 206) and a solid (104, 207) closely bonded thereto and having substantially the same acoustic impedance as said piezoelectric device.

20. An apparatus according to claim 19, **characterised in that** the ratio between a time defined by dividing a thickness in the vibration direction of said piezoelectric device (103, 206) by an acoustic speed therefor and a time defined by dividing a thickness in the vibration direction of said solid (104, 207) by an acoustic speed for said solid is more than 1 to less than 3.

Patentansprüche

1. Vorrichtung zur Erzeugung von Ultraschallwellen, aufweisend:

eine Einrichtung (1 bis 4, 7, 8, 11, 12, 20) zum gleichzeitigen Bestrahlen eines Objekts mit einer kontinuierlichen Ultraschall-Grundwelle mit einer Grundfrequenz f_0 und einer kontinuierlichen ersten Ultraschall-Oberwelle mit der Frequenz $2f_0$ der ersten Oberwelle der Grundfrequenz,

dadurch gekennzeichnet, daß

die Grundwelle und die erste Oberwelle beide auf den gleichen Fokus fokussiert sind und die Intensität der ersten Oberwelle am Fokus größer als $1/4$ und kleiner als das Vierfache der Intensität der Grundwelle beträgt.

2. Vorrichtung nach Anspruch 1, **gekennzeichnet durch** einen Ultraschallsender mit einem Sendeelement (1-1...1-N) zum Erzeugen der Grundwelle und einem anderen Sendeelement (2-1 ...2-M) zum Erzeugen der ersten Oberwelle, wobei die Sendeelemente unabhängig voneinander sind und jedes von einer entsprechenden unabhängigen Signalspannung angesteuert wird.

3. Vorrichtung nach Anspruch 2, **dadurch gekennzeichnet, daß** der Ultraschallsender ein Feld mit mehreren Sendeelementen (1-1...1-N) zur Erzeugung der Grundwelle und mehreren Sendeelementen (2-1...2-M) zur Erzeugung der ersten Oberwelle aufweist.

4. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** die Wellenform der ersten Oberwelle durch $-\sin(4\pi ft)$ und die Wellenform der Grundwelle durch $\sin(2\pi ft)$ gegeben ist.

5. Vorrichtung nach Anspruch 1, **gekennzeichnet durch** eine Ultraschall-Bildgebungseinheit (21...25, 30), die so eingerichtet ist, daß sie **durch** Aussenden und Empfangen einer Impulswelle mit höherer Frequenz als die erste Oberwelle ein Ultraschall-Echobild des bestrahlten Objekts bildet.

6. Vorrichtung nach Anspruch 1, **gekennzeichnet durch** eine Einrichtung (5, 6, 9, 10, 13, 14) zum Empfang von Ultraschallwellen mit einem ganzzahligen Vielfachen der Frequenz der ersten Oberwelle, die **durch** Kavitation am mit der Grundwelle und der ersten Oberwelle bestrahlten Objekt erzeugt werden.

7. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** die kontinuierliche Ultraschall-Grundwelle und die kontinuierliche erste Ultraschall-Oberwelle gleichzeitig vom gleichen piezoelektrischen Element (1-1...1-N) auf das gleiche Objekt gestrahlt werden.

8. Vorrichtung nach Anspruch 7, **dadurch gekennzeichnet, daß** das piezoelektrische Element (71, 72) aus einem piezoelektrischen Material sowie einem Material mit der gleichen akustischen Impedanz wie das piezoelektrische Material und einer akustischen Dicke von der halben Wellenlänge der Grundwelle aufgebaut ist und eine Dicke aufweist, die über etwa $2/3$ der akustischen Dicke piezoelektrisch angesteuert ist.

9. Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, daß** das piezoelektrische Element (71, 72) einen ersten

Bereich (72), der im wesentlichen 1/3 der akustischen Dicke entspricht, und einen zweiten Bereich (71), der im wesentlichen 2/3 der akustischen Dicke entspricht, aufweist und die Bereiche zusammengefügt sind, und daß lediglich der zweite Bereich (71) piezoelektrisch angesteuert wird.

10. Vorrichtung nach Anspruch 7, **gekennzeichnet durch** eine Gegentaktschaltung (3-1...3-N) zur Ansteuerung des piezoelektrischen Elements (1-1...1-N) mit zwei Schaltelementen (53, 54, 63, 64), von denen in einem Zustand der Schaltung eines ein- und das andere ausgeschaltet ist, das Ein-/Ausschalten in einem anderen Zustand umgekehrt wird, die genannten Zustände von der Schaltung wiederholt angenommen werden und das Verhältnis zwischen den Zeiten, in denen die entsprechenden Zustände bestehen, im wesentlichen 1:3 oder 3:1 beträgt.

11. Vorrichtung nach Anspruch 10, **gekennzeichnet durch** eine Treiberschaltung (3-1...3-N) mit drei Gleichstrom-Konstantspannungsquellen (49, 50, 60) und in drei Gruppen pro piezoelektrischem Element (1-1...1-N) vorgesehenen Schaltelementen (53, 54, 63, 64) zum Ein/Ausschalten der elektrischen Verbindung zwischen jeder der Konstantspannungsquellen und dem piezoelektrischen Element.

12. Vorrichtung nach Anspruch 1, **gekennzeichnet durch** eine erste Schaltung (47) zum Ansteuern eines piezoelektrischen Elements (1-1...1-N) mit der Grundfrequenz und einer zweiten Schaltung (48) zum Ansteuern des piezoelektrischen Elements mit der ersten Oberwelle der Grundfrequenz, wobei das piezoelektrische Element mit der ersten Schaltung (47) über eine Drossel (44) mit einer Induktivität von $5/8L$ und mit der zweiten Schaltung (48) über eine Drossel (45) mit einer Induktivität von $10/9L$ und über einen in Serie mit dieser Induktivität geschalteten Kondensator mit einer Kapazität von $9/25C$ verbunden ist, wobei die Gesamtkapazität des piezoelektrischen Elements und eines anderen mit ihm parallel geschalteten Kondensators (43) C beträgt und die mit der Gesamtkapazität bei der Grundwelle in Resonanz befindliche Induktivität L beträgt.

13. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** die Wellenfronten der beiden Frequenzen im wesentlichen parallel zueinander gemacht werden.

14. Ultraschall-Reinigungsvorrichtung mit einer Vorrichtung zur Erzeugung von Ultraschallwellen nach Anspruch 1 zur Bestrahlung des genannten Objekts über ein Flüssigkeitsmedium.

15. Vorrichtung nach Anspruch 14, **gekennzeichnet durch** einen Reinigungstank (102) zur Aufnahme des bestrahlten Objekts (109, 121).

16. Vorrichtung nach Anspruch 14, **gekennzeichnet durch** eine Strahleinheit (113) zum Ausspritzen eines Flüssigkeitsmediums (120), **durch** das die Ultraschallwellen auf das Objekt (109, 121) gestrahlt werden.

17. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** die Wellenform der ersten Oberwelle $\sin(4\pi ft + \alpha)$ und die Wellenform der Grundwelle $\sin(2\pi ft)$ folgt, wobei α eine rationale Zahl von mehr als $(1/4)\pi$ bis weniger als $(7/4)\pi$ ist.

18. Flüssigkeitssterilisationsvorrichtung mit einer Vorrichtung zur Erzeugung von Ultraschallwellen nach Anspruch 1.

19. Vorrichtung nach Anspruch 14 oder 18, **gekennzeichnet durch** ein Ultraschall-Dickenschwingungselement mit einer Schichtstruktur aus einer Piezoelektrischen Einrichtung (103, 206) und einem Festkörper (104, 207), der dicht daran angefügt ist und im wesentlichen die gleiche akustische Impedanz wie die piezoelektrische Einrichtung aufweist.

20. Vorrichtung nach Anspruch 19, **dadurch gekennzeichnet, daß** das Verhältnis zwischen einer Zeit, die durch Dividieren einer Dicke der piezoelektrischen Einrichtung (103, 206) in Schwingungsrichtung durch die akustische Geschwindigkeit dafür festgelegt ist, und einer Zeit, die durch Dividieren einer Dicke des Festkörpers (104, 207) in Schwingungsrichtung durch eine akustische Geschwindigkeit für den Festkörper festgelegt ist, mehr als 1 und weniger als 3 beträgt.

Revendications

1. Dispositif pour produire des ondes ultrasonores, comportant :

des moyens (1 à 4, 7, 8, 11, 12, 20) pour irradier simultanément un objet avec une onde fondamentale ultrasonore continue ayant une fréquence fondamentale f_0 et une onde ultrasonore d'harmonique de rang deux continue ayant la fréquence $2f_0$ de l'harmonique de rang deux de la fréquence fondamentale,

caractérisé en ce que

ladite onde fondamentale et ladite onde d'harmonique de rang deux sont toutes deux focalisées sur le même foyer et l'intensité de l'onde d'harmonique de rang deux au niveau du foyer est plus grande que 1/4 et plus petite que quatre fois l'intensité de l'onde fondamentale.

2. Dispositif selon la revendication 1, **caractérisé en ce qu'il** est prévu un émetteur ultrasonore qui comporte un élément émetteur (1-1...1 pour produire l'onde fondamentale et un autre élément émetteur (2-1...2-M) pour produire l'onde d'harmonique de rang deux, lesdits éléments émetteurs étant indépendants l'un de l'autre, et **en ce que** chacun desdits éléments est excité par une tension de signal indépendante, respectivement.
3. Dispositif selon la revendication 2, **caractérisé en ce que** ledit émetteur ultrasonore est un réseau comportant une pluralité d'éléments émetteurs (1-1...1-N) pour produire l'onde fondamentale et une pluralité d'éléments émetteurs (2-1...2-M) pour produire l'onde d'harmonique de rang deux.
4. Dispositif selon la revendication 1, **caractérisé en ce que** la forme d'onde de l'onde d'harmonique de rang deux est $-\sin(4\pi ft)$ et la forme d'onde de l'onde fondamentale est $\sin(2\pi ft)$.
5. Dispositif selon la revendication 1, **caractérisé en ce qu'il** est prévu une unité d'imagerie ultrasonore (21...25, 30) qui est configurée de manière à former une image d'écho ultrasonore de l'objet irradié en émettant et recevant une onde pulsée ayant une fréquence plus élevée que l'onde d'harmonique de rang deux.
6. Dispositif selon la revendication 1, **caractérisé par** des moyens (5, 6, 9, 10, 13, 14) pour recevoir des ondes ultrasonores ayant un multiple pair de la fréquence de l'onde d'harmonique de rang deux et produite par cavitation au niveau de l'objet irradié par l'onde fondamentale et l'onde d'harmonique de rang deux.
7. Dispositif selon la revendication 1, **caractérisé en ce que** l'onde fondamentale ultrasonore continue et l'onde d'harmonique de rang deux ultrasonore continue sont irradiées simultanément à partir du même élément piézoélectrique (1-1...1-N) vers le même objet.
8. Dispositif selon la revendication 7, **caractérisé en ce que** l'élément piézoélectrique (71, 72) est constitué d'un matériau piézoélectrique et d'un matériau ayant la même impédance acoustique que le matériau piézoélectrique et ayant une épaisseur acoustique d'une demi-longueur d'onde de l'onde fondamentale et **en ce que** l'élément piézoélectrique (71, 72) a une épaisseur sensiblement égale à 2/3 de l'épaisseur acoustique entraînée piézoélectriquement.
9. Dispositif selon la revendication 8, **caractérisé en ce que** l'élément piézoélectrique (71, 72) a une première zone (72) correspondant sensiblement à 1/3 de l'épaisseur acoustique et une seconde zone (71) correspondant sensiblement à 2/3 de l'épaisseur acoustique, lesquelles zones sont reliées l'une à l'autre et **en ce que** seule ladite seconde zone (71) est entraînée piézoélectriquement.
10. Dispositif selon la revendication 7, **caractérisé en ce qu'il** est prévu un circuit push-pull (3-1...3-N) pour exciter ledit élément piézoélectrique (1-1...1-N), ayant deux éléments de commutation (53, 54, 63, 64) dont un premier est rendu passant et l'autre est rendu bloquant dans un état du circuit, l'action de rendre passant/bloquant étant inversée dans un autre état, lesdits états étant pris de manière répétitive par ledit circuit, et le rapport entre les temps pendant lesquels des états respectifs persistent étant sensiblement de 1:3 ou 3:1.
11. Dispositif selon la revendication 10, **caractérisé en ce qu'il** est prévu un circuit d'excitation (3-1...3-N) qui comporte trois sources de potentiel constant de courant continu (49, 50, 60) et des éléments de commutation (53, 54, 63, 64) agencés en trois groupes par élément piézoélectrique (1-1...1-N) pour commuter entre passant/bloquant la connexion électrique entre chacune desdites sources de potentiel constant et ledit élément piézoélectrique.
12. Dispositif selon la revendication 1, **caractérisé par** un premier circuit (47) pour exciter un élément piézoélectrique (1-1...1-N) à la fréquence fondamentale et un second circuit (48) pour exciter ledit élément piézoélectrique au

second harmonique de la fréquence fondamentale, ledit élément piézoélectrique étant relié audit premier circuit (47) à travers un inducteur (44) ayant une inductance de $5/8 L$ et audit second circuit électrique (48) à travers un inducteur (45) ayant une inductance de $10/9 L$ et à travers un condensateur (46) relié en série avec cette inductance et ayant une capacité de $9/25 C$, où la capacité totale dudit élément piézoélectrique et d'un autre condensateur (43) relié en parallèle à celui-ci est C et l'inductance de résonance avec la capacité totale à la fréquence fondamentale est L .

13. Dispositif selon la revendication 1, **caractérisé en ce que** les fronts d'onde desdites deux fréquences sont rendus sensiblement parallèles l'un à l'autre.

14. Dispositif de nettoyage ultrasonore ayant un dispositif pour produire des ondes ultrasonores selon la revendication 1 pour irradier ledit objet à travers un milieu constitué d'un liquide.

15. Dispositif selon la revendication 14, **caractérisé par** un réservoir de nettoyage (102) destiné à contenir l'objet irradié (109, 121).

16. Dispositif selon la revendication 14, **caractérisé par** une unité de projection (113) pour éjecter un milieu liquide (120) à travers lequel lesdites ondes ultrasonores sont irradiées sur ledit objet (109, 121).


17. Dispositif selon la revendication 1, **caractérisé en ce que** la forme d'onde de l'onde d'harmonique de rang deux est $\sin(4\pi ft + \alpha)$ et la forme d'onde de l'onde fondamentale est $\sin(2\pi ft)$ où α est un nombre réel qui est plus grand que $(1/4)\pi$ mais plus petit que $(7/4)\pi$.

18. Dispositif de stérilisation de liquide ayant un dispositif pour produire des ondes ultrasonores selon la revendication 1.

19. Dispositif selon la revendication 14 ou 18, **caractérisé par** un élément formant vibreur d'épaisseur ultrasonore ayant une structure stratifiée constituée d'un dispositif piézoélectrique (103, 206) et d'un solide (104, 207) fixé étroitement sur celui-ci et ayant sensiblement la même impédance acoustique que ledit dispositif piézoélectrique.

20. Dispositif selon la revendication 19, **caractérisé en ce que** le rapport entre le temps défini en divisant l'épaisseur dans la direction de vibration dudit dispositif piézoélectrique (103, 206) par la vitesse acoustique de celui-ci et le temps défini en divisant l'épaisseur dans la direction de vibration dudit solide (104, 207) par la vitesse acoustique dudit solide est plus grand que 1 mais plus petit que 3.

FIG. 1

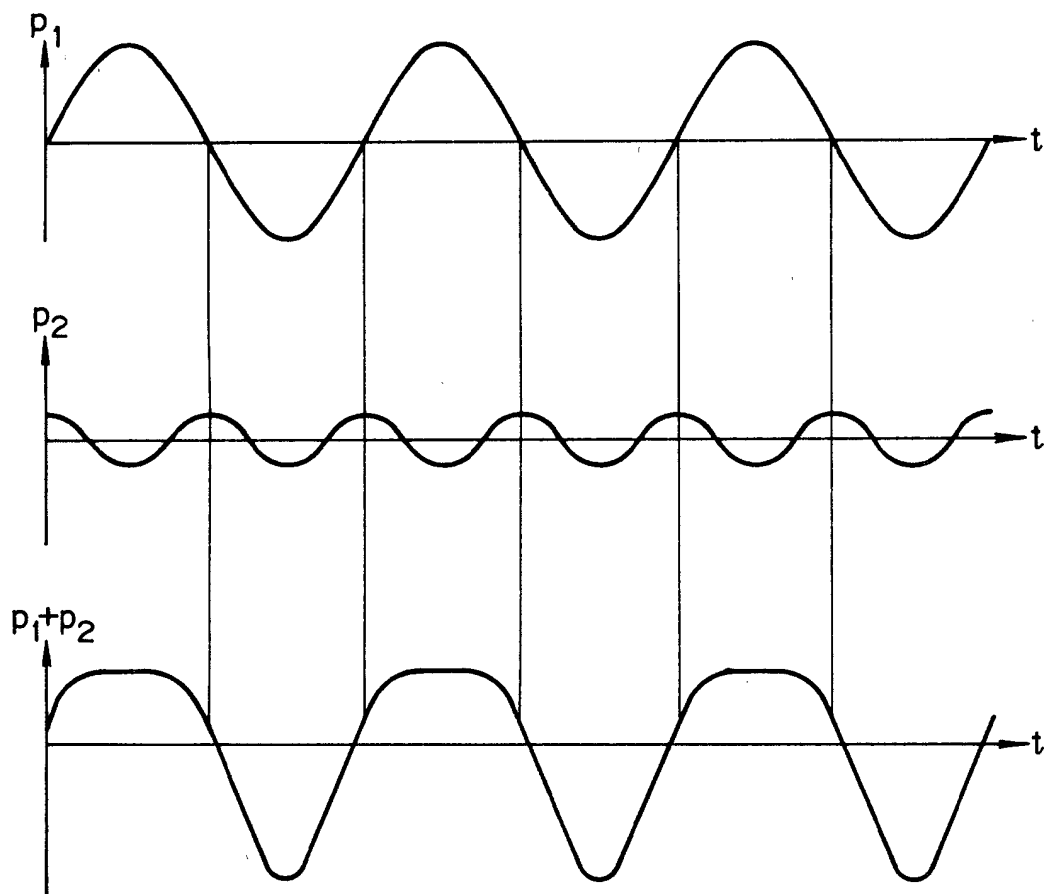


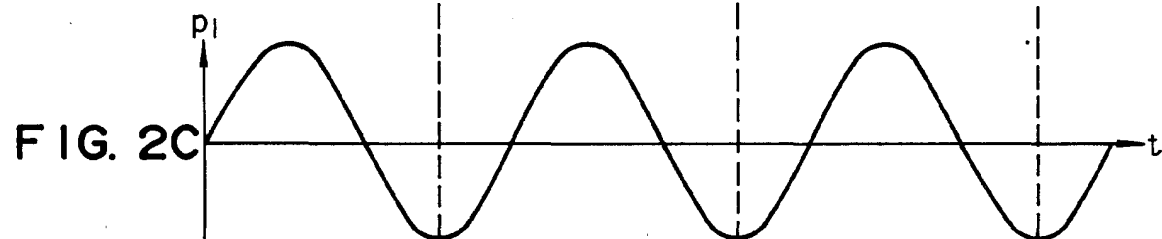
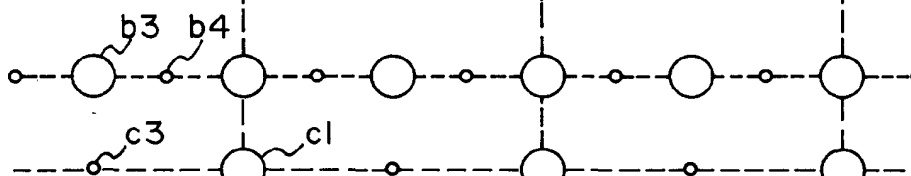
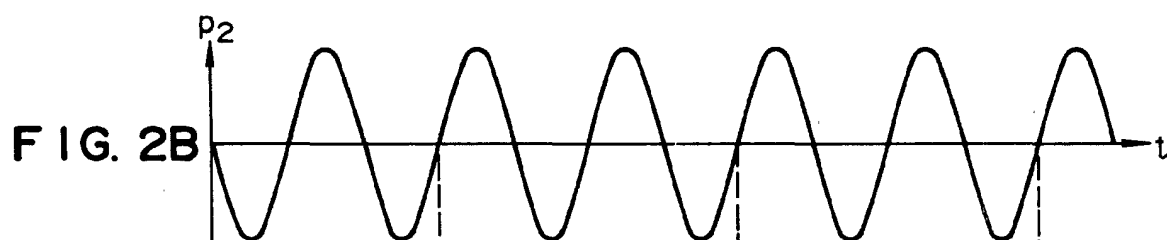

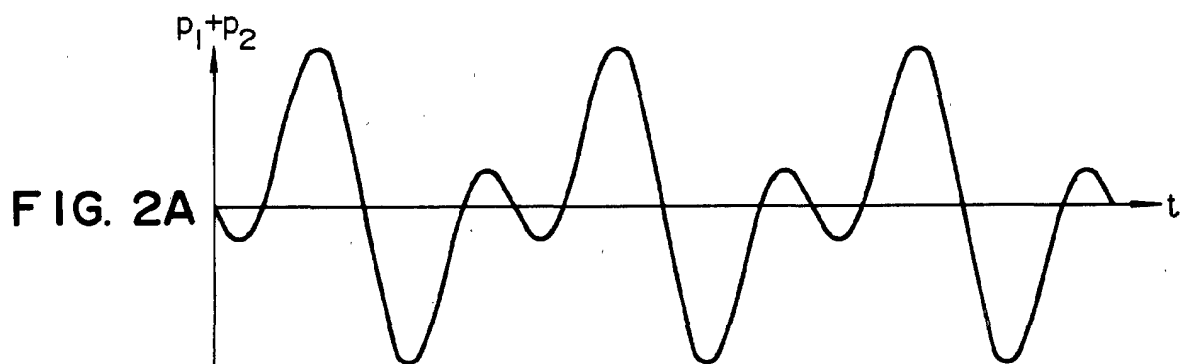


FIG. 3

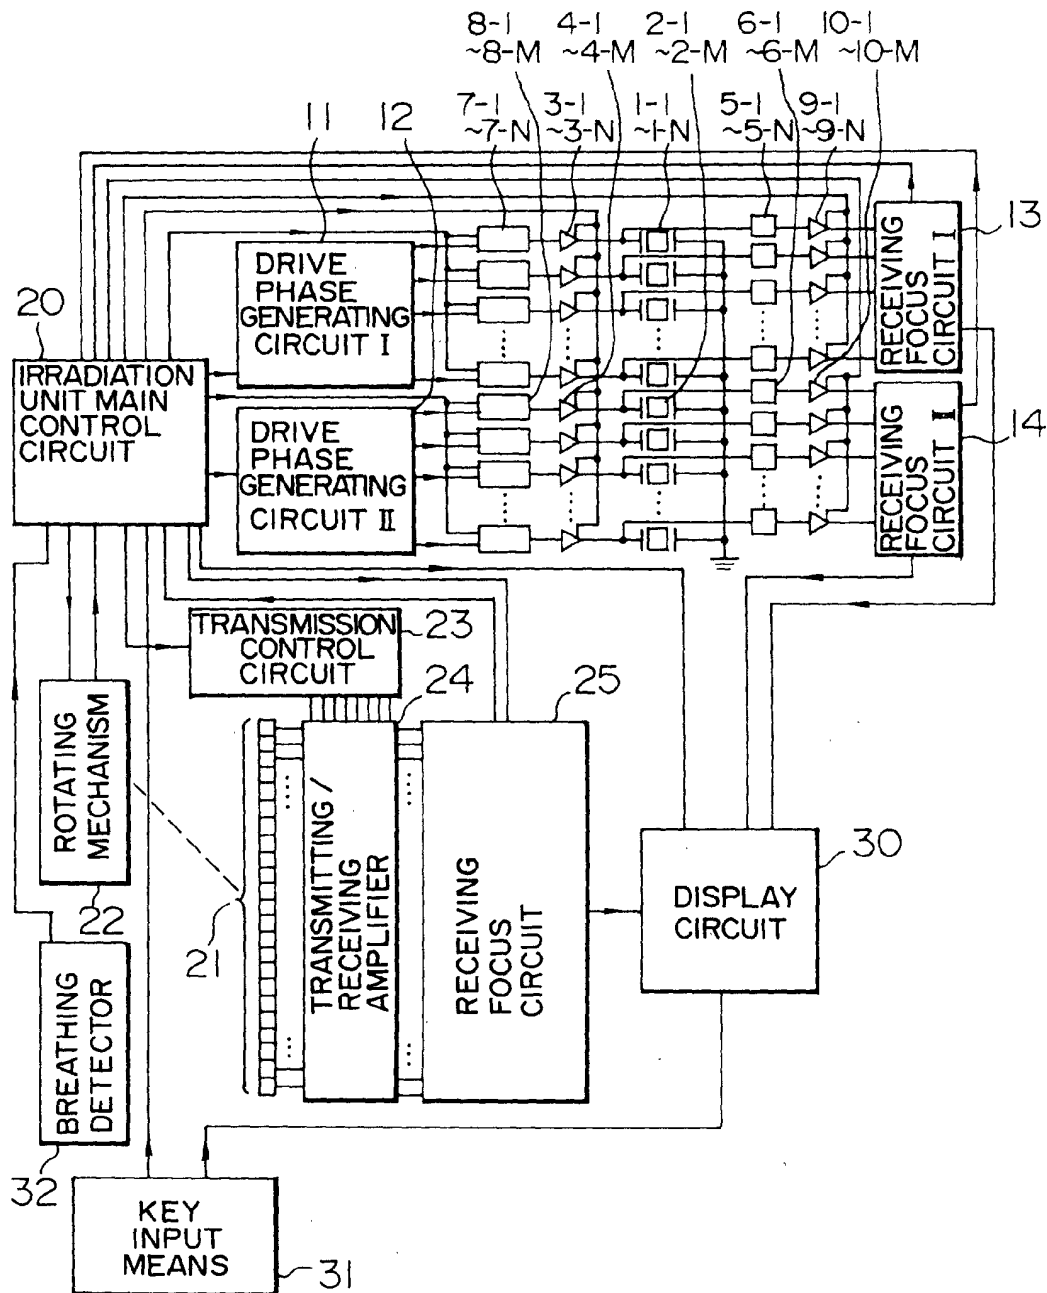


FIG. 4A

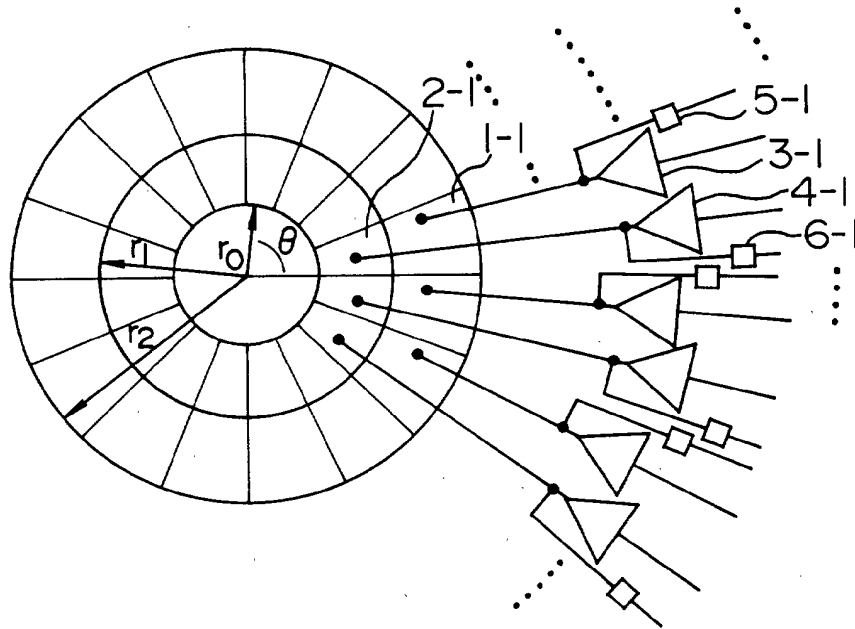


FIG. 4B

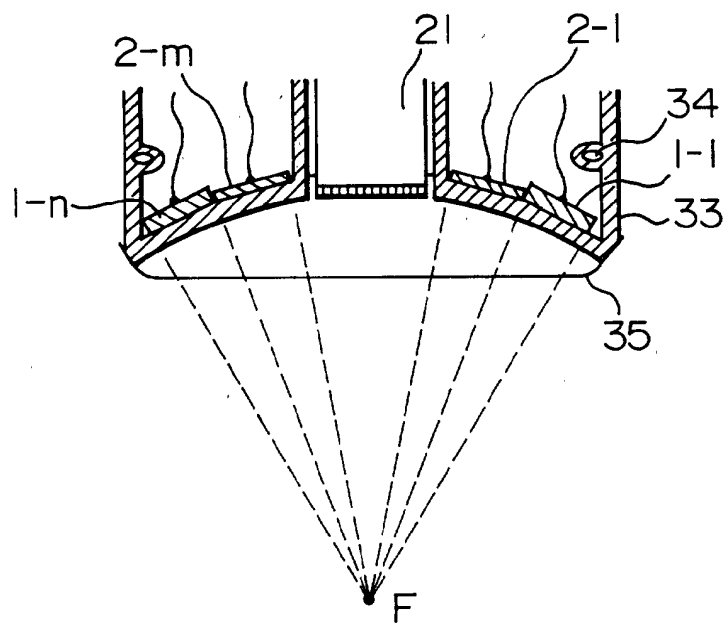


FIG. 5

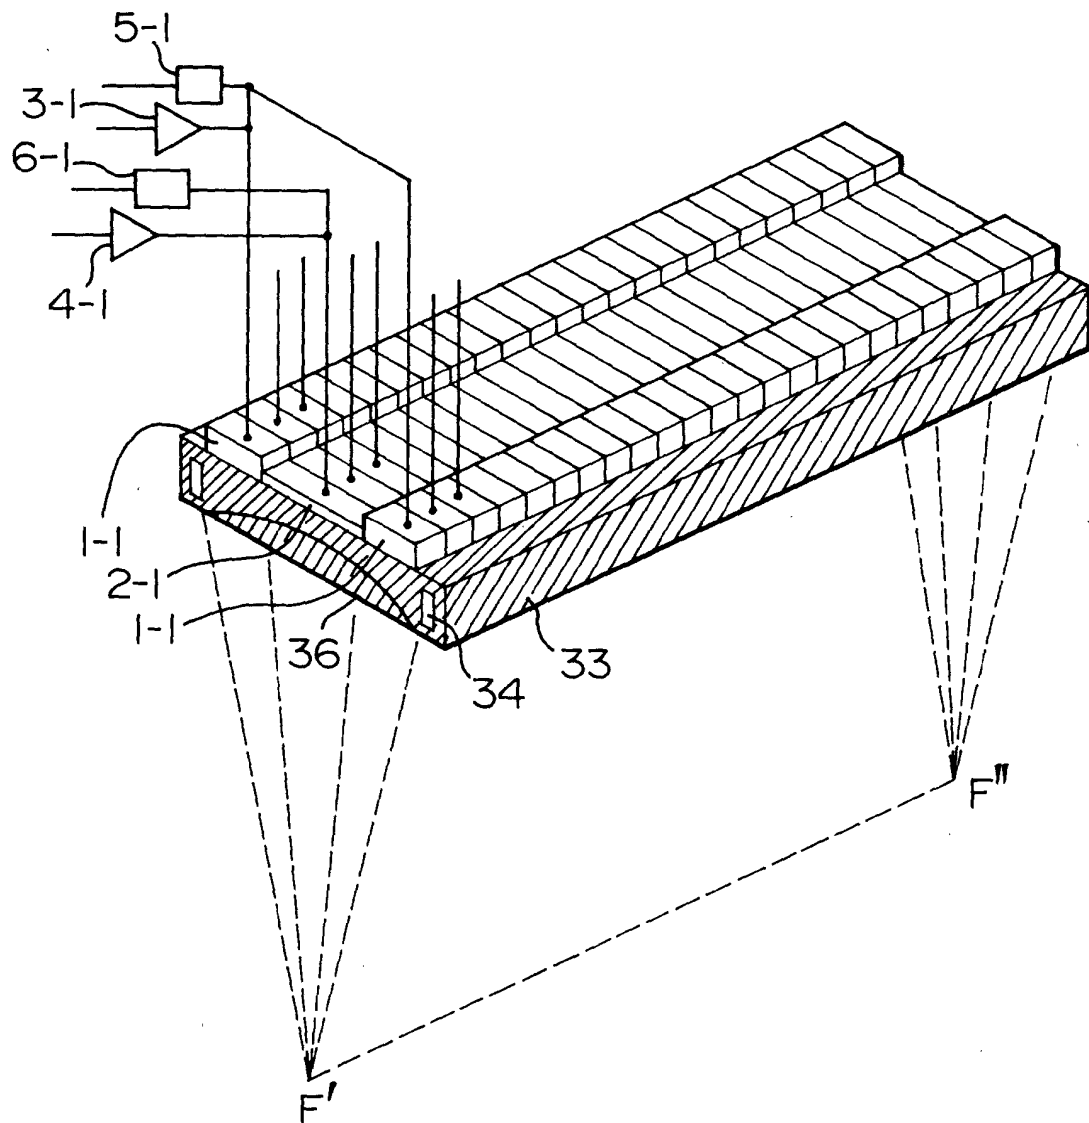


FIG. 6

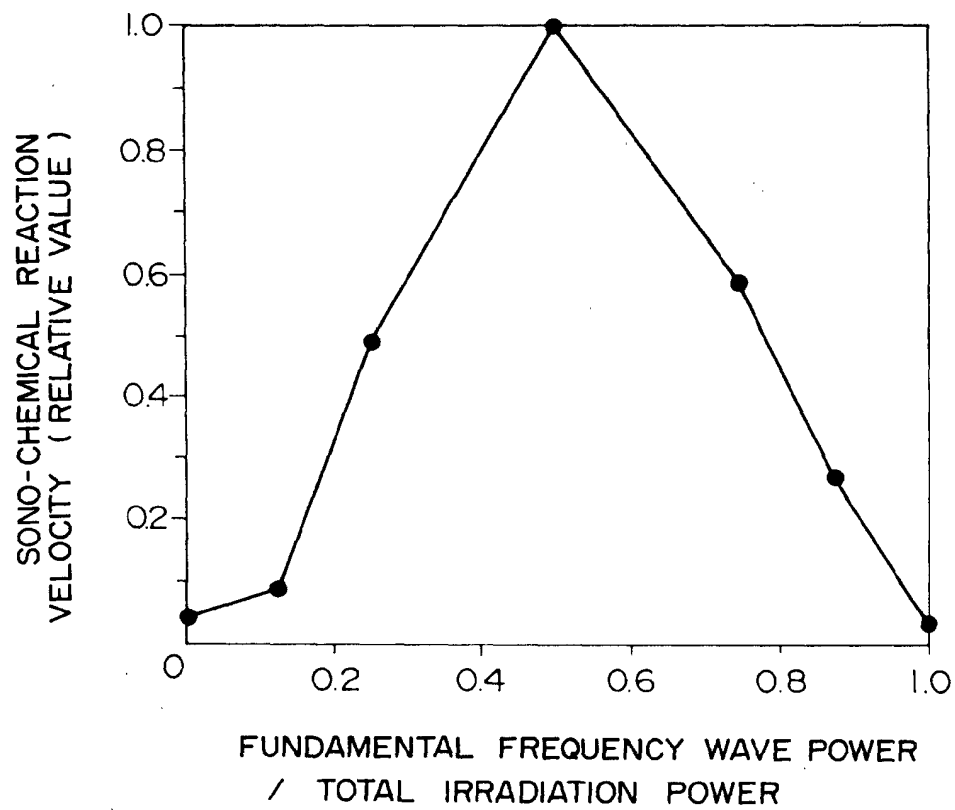


FIG. 7

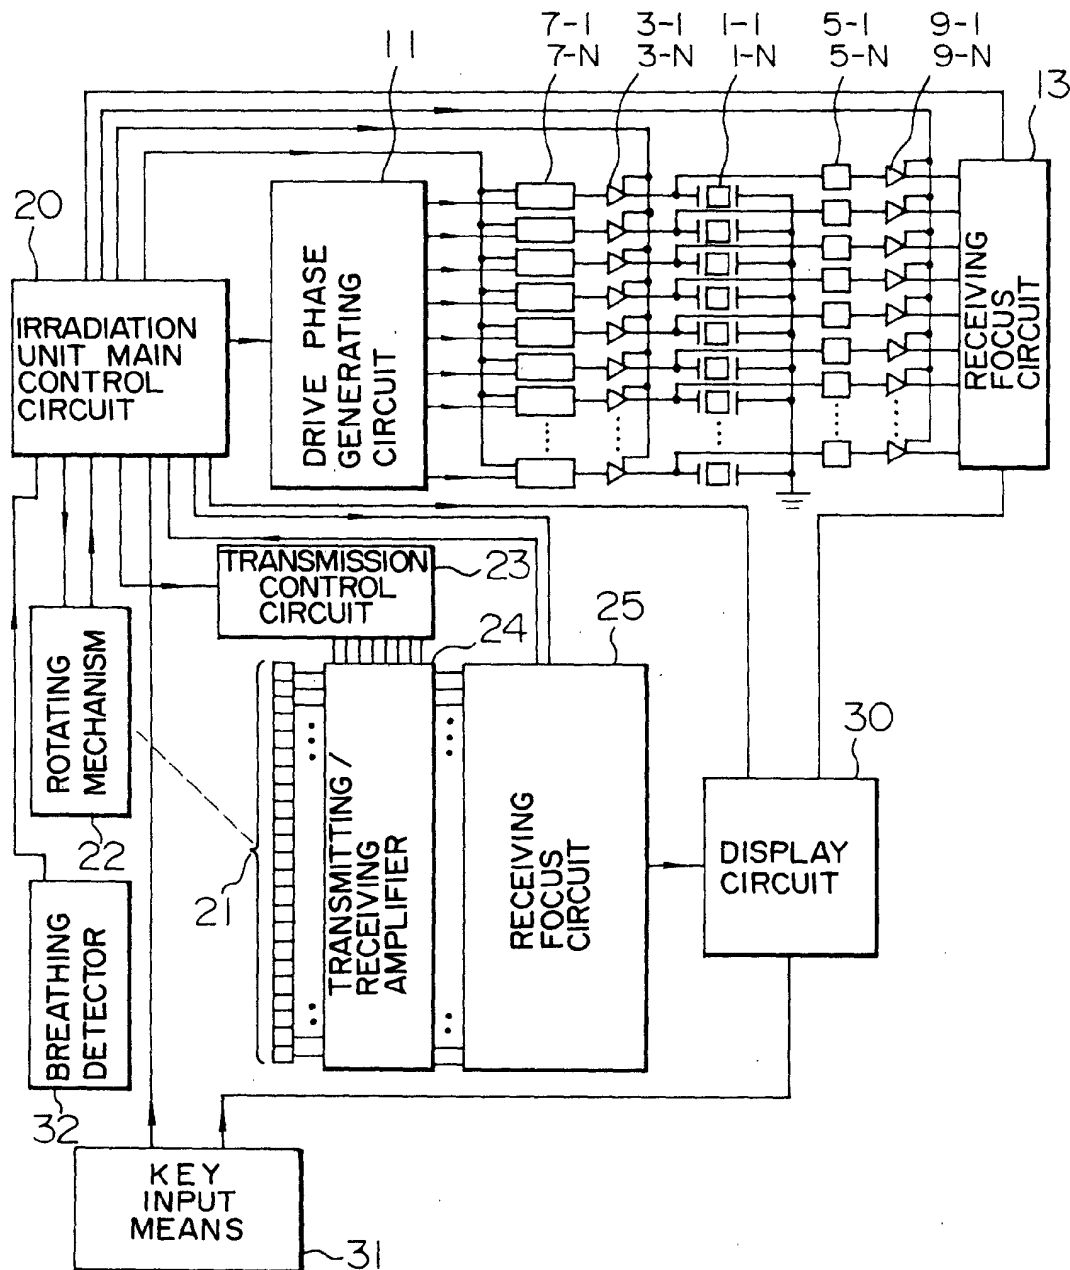


FIG. 8

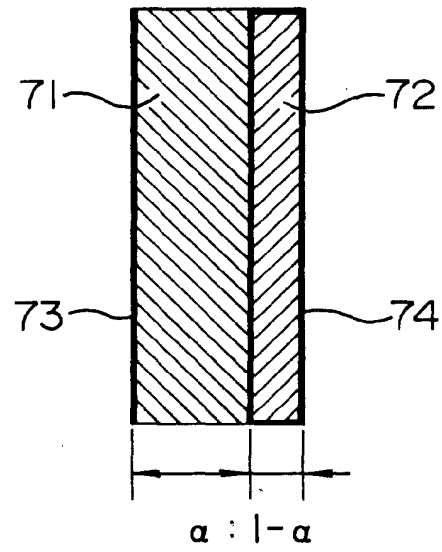


FIG. 9

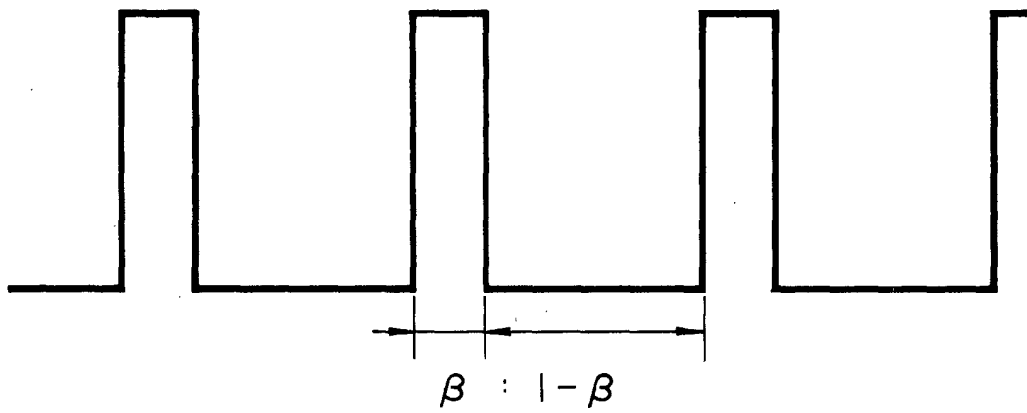


FIG. 10

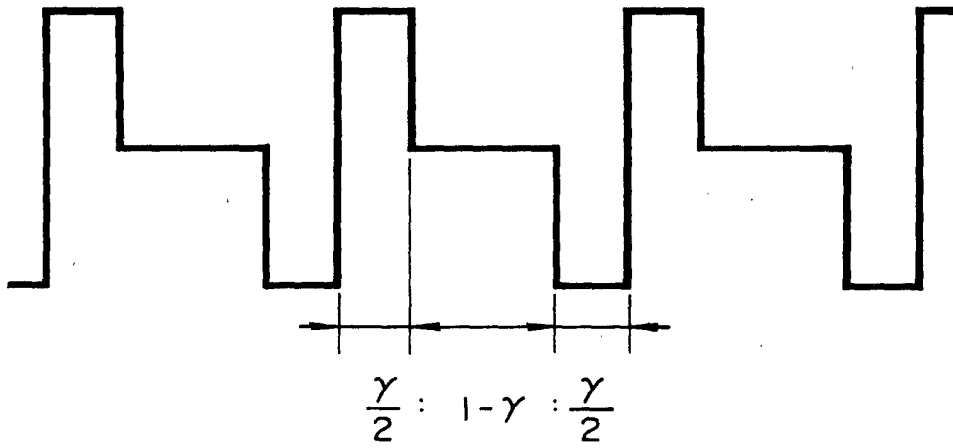


FIG. 11

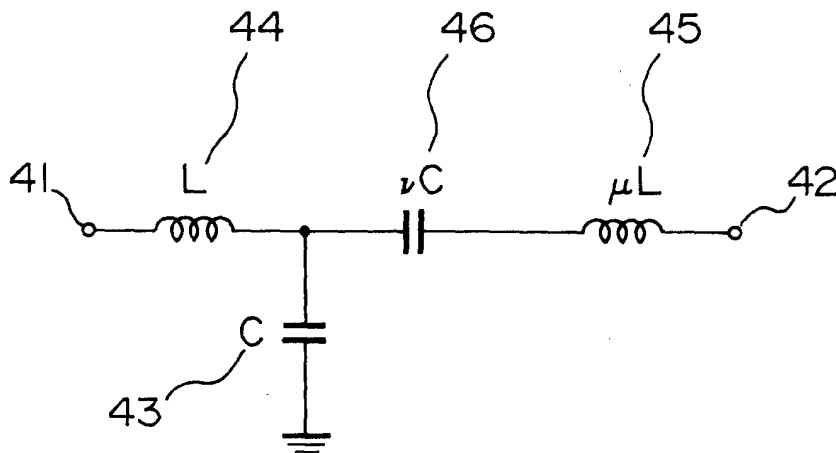


FIG. 12

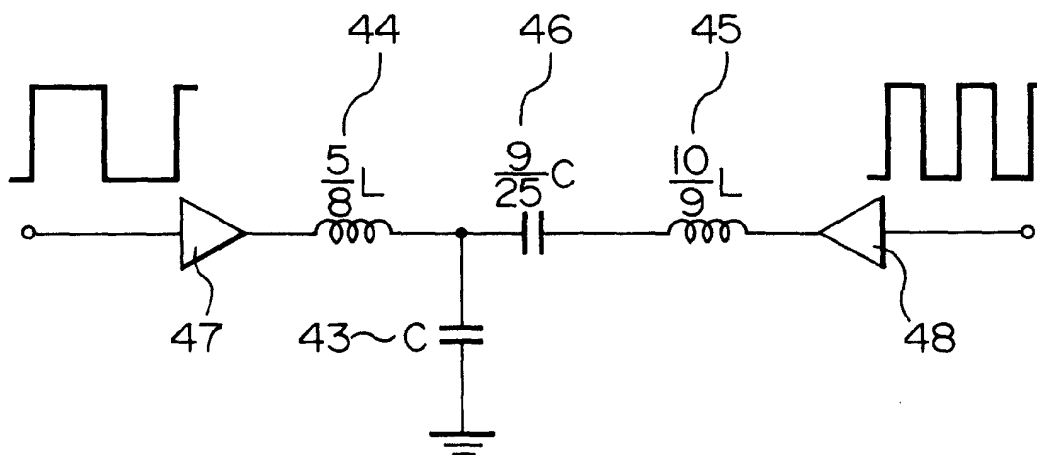


FIG. 13

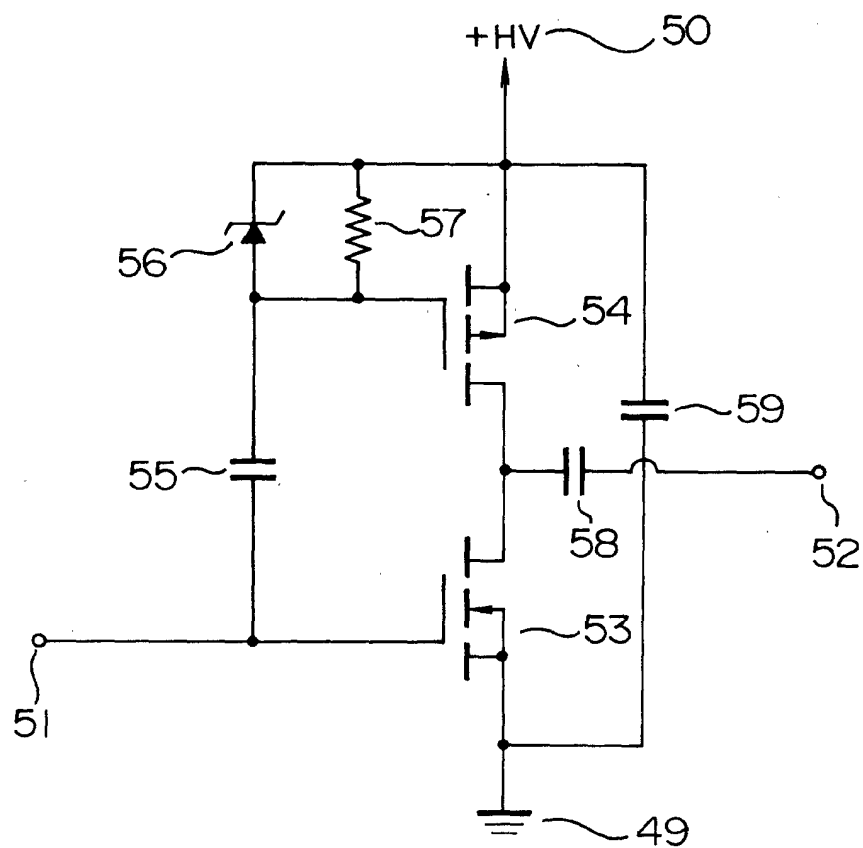


FIG. 14A

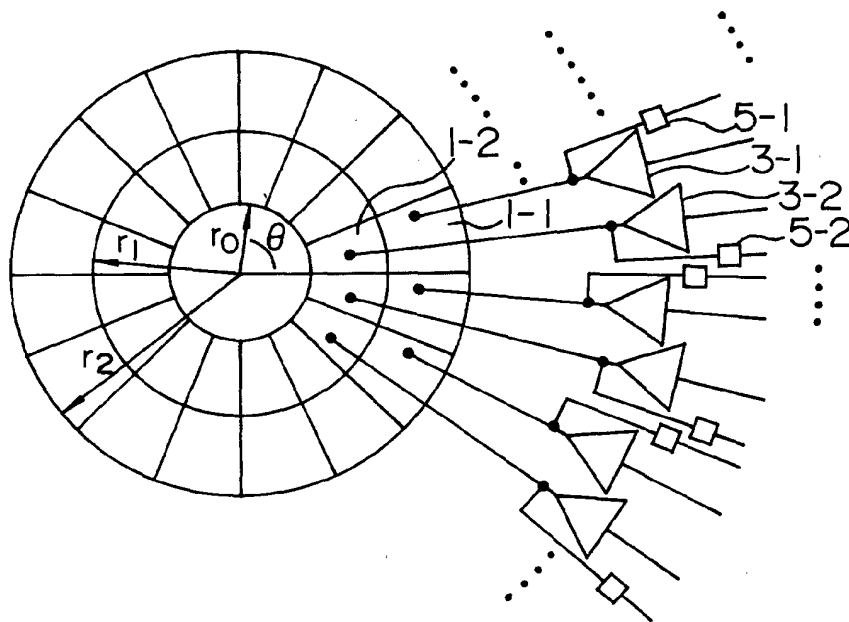


FIG. 14B

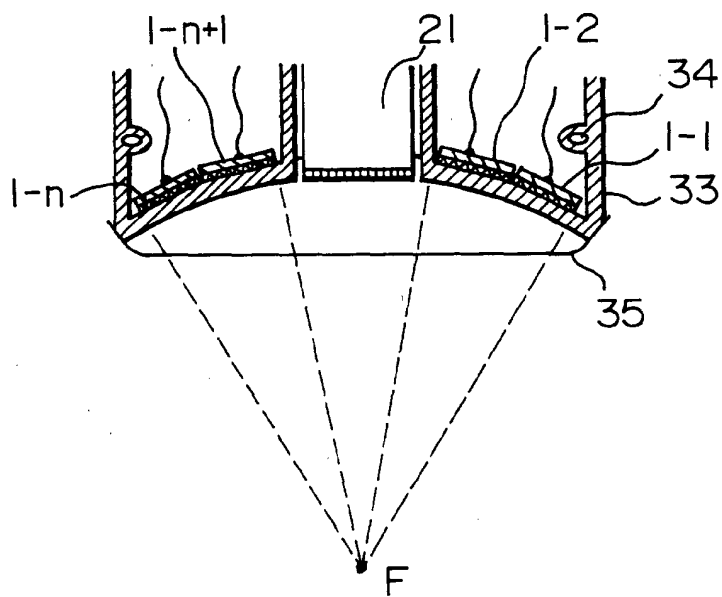


FIG. 15

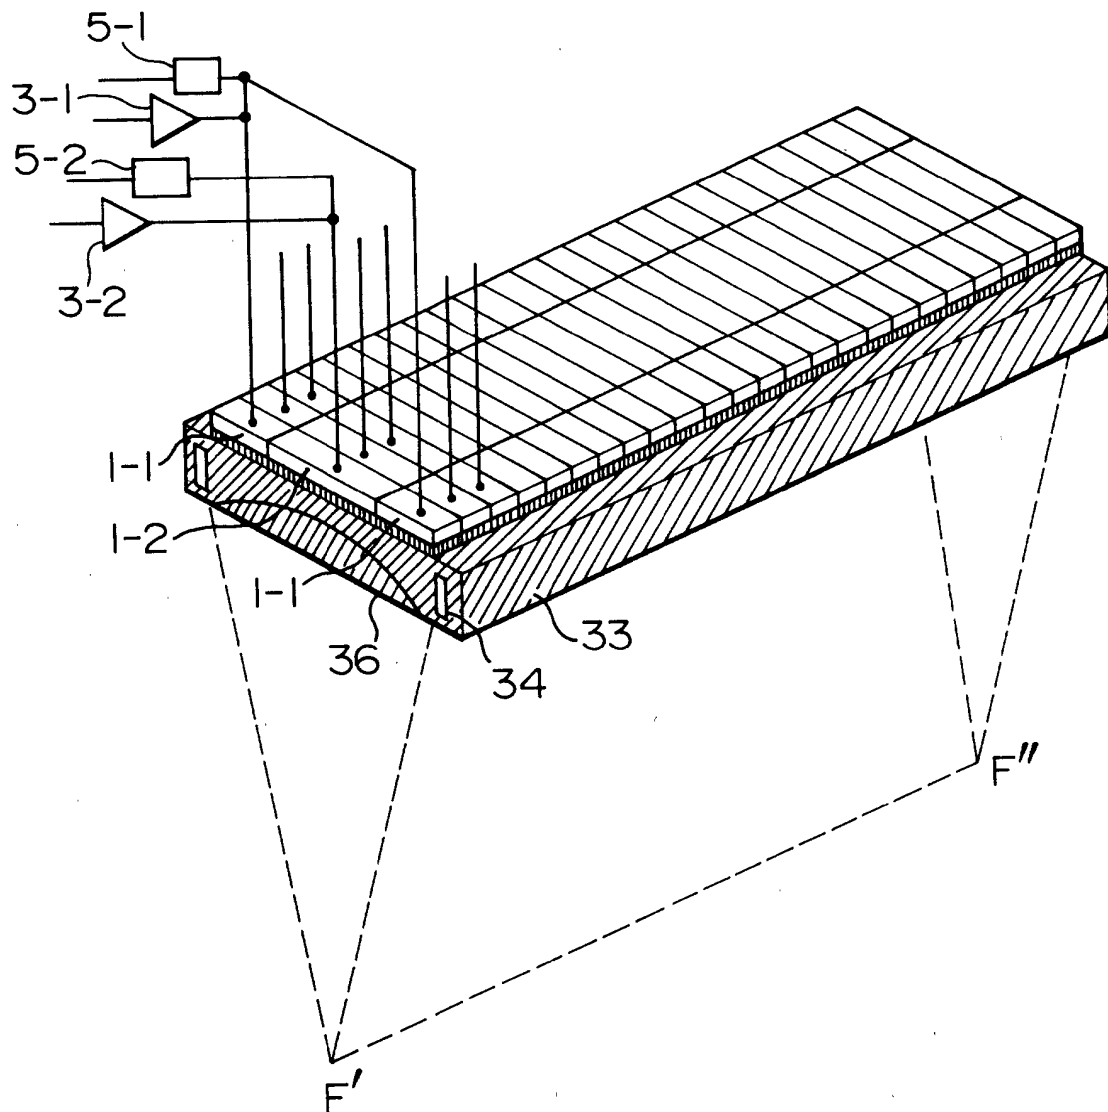


FIG. 16

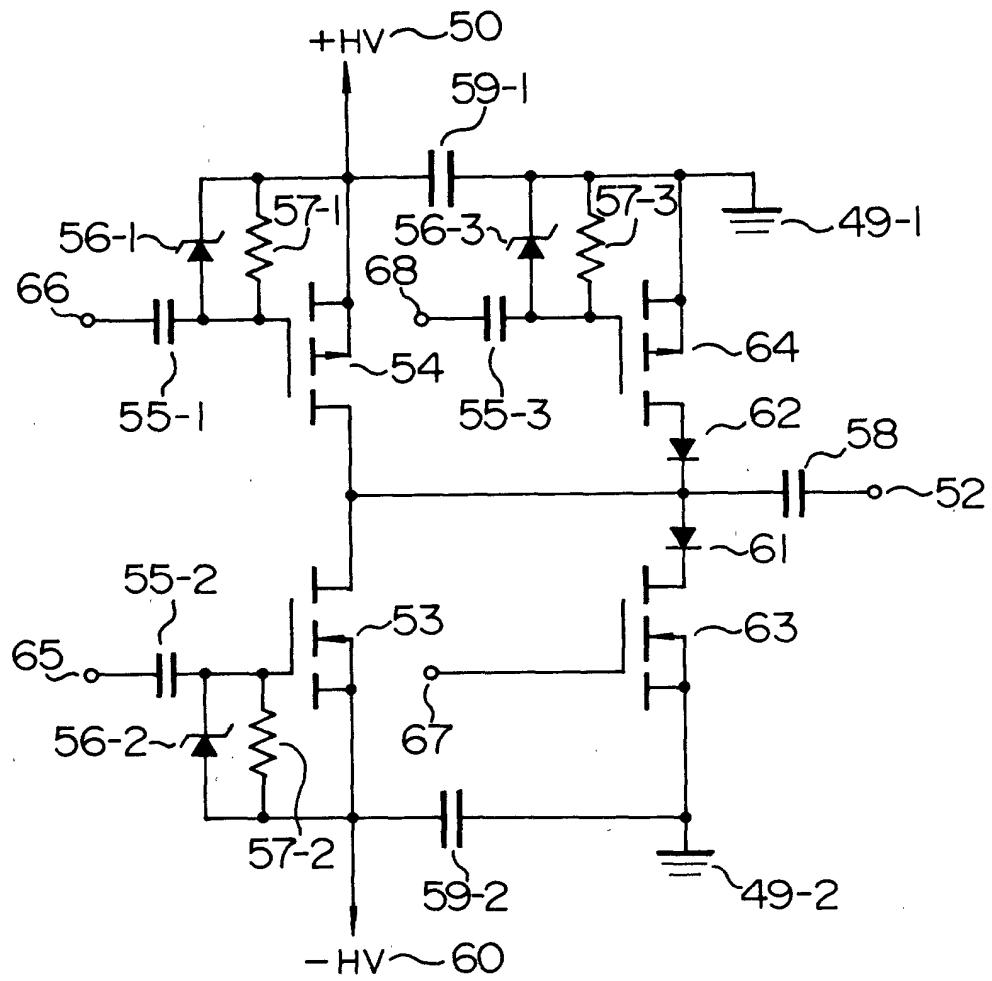


FIG. 17

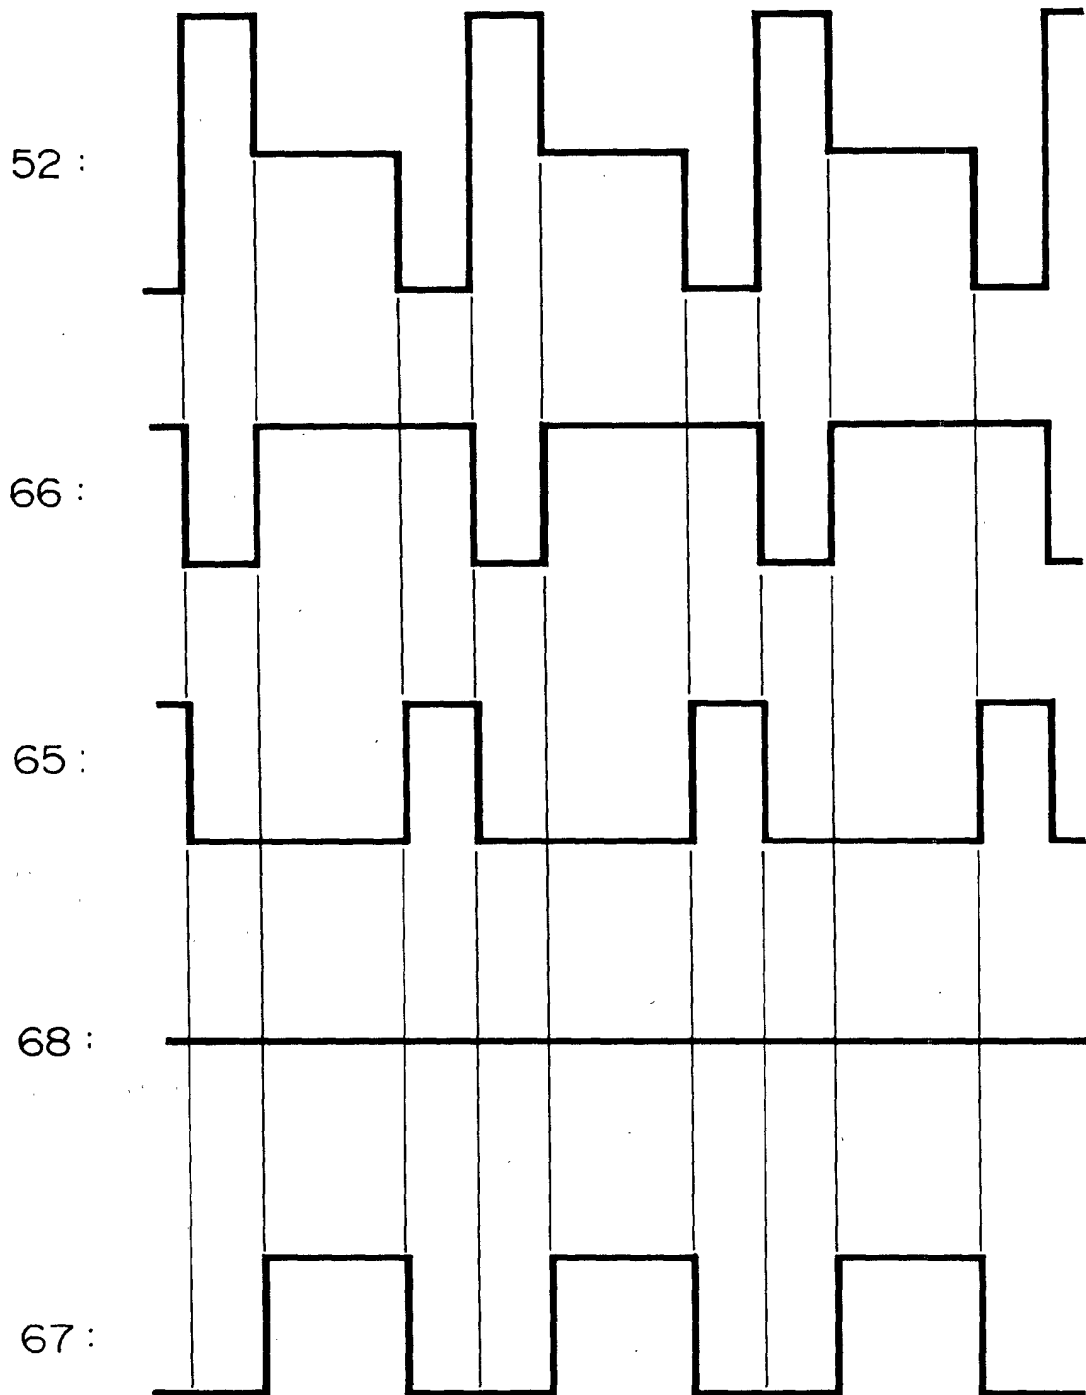


FIG. 18

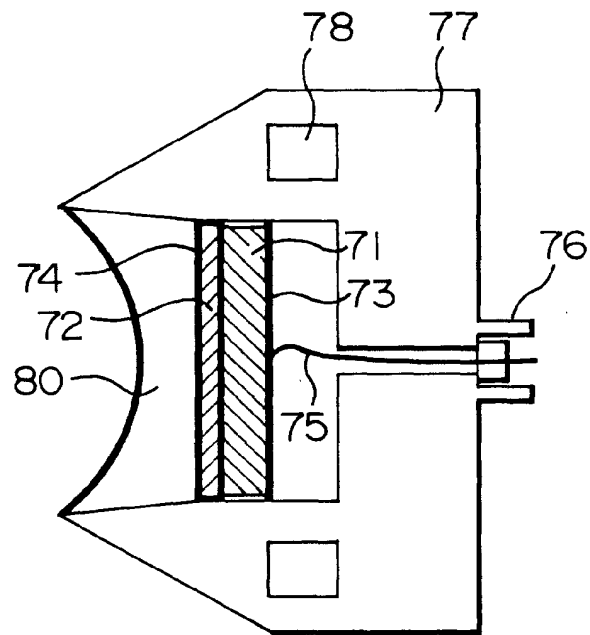


FIG. 19

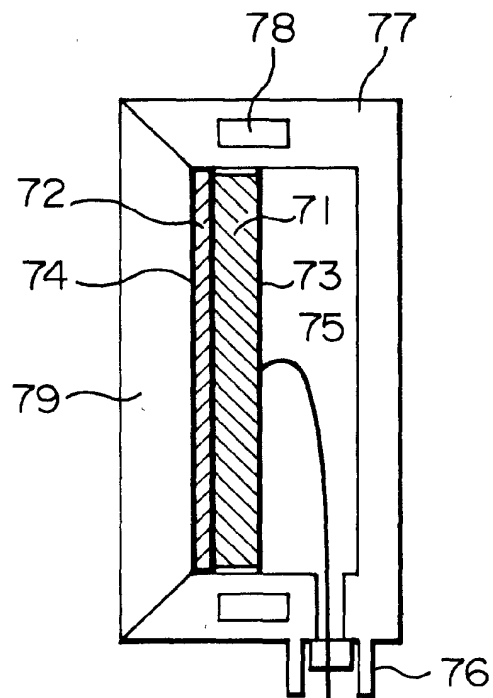


FIG. 20

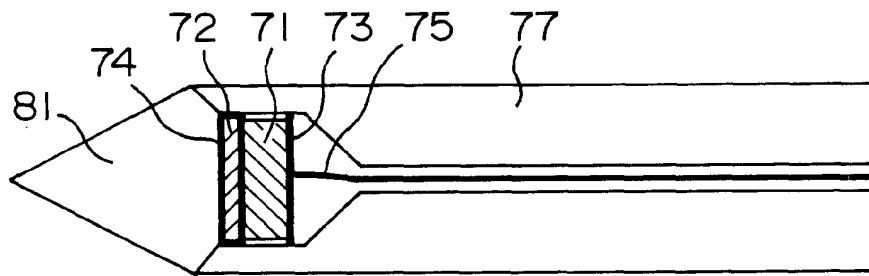


FIG. 21

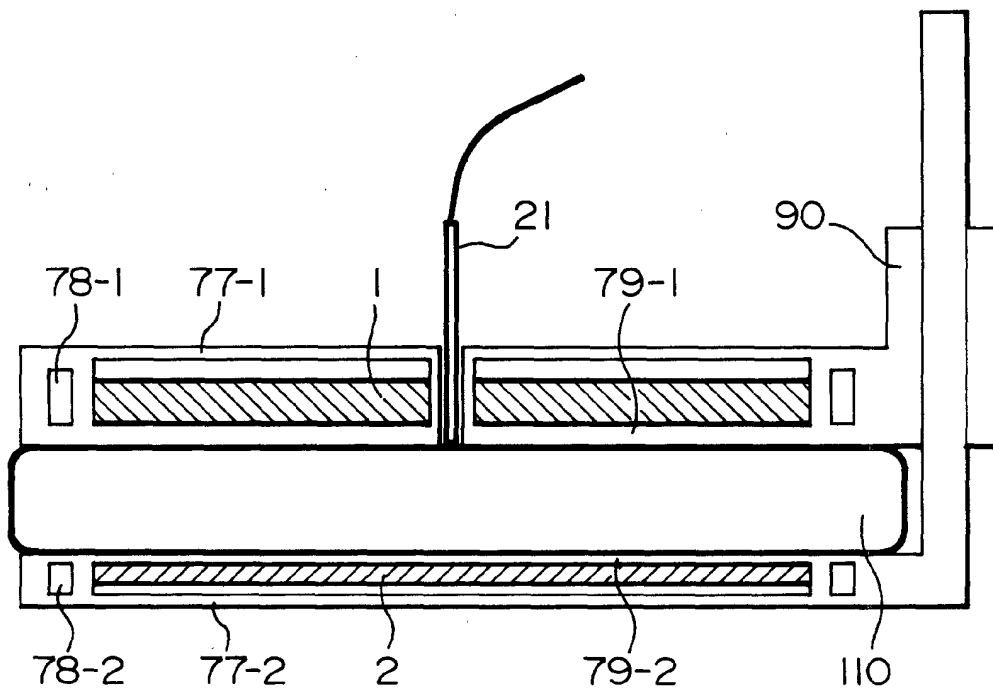


FIG. 22

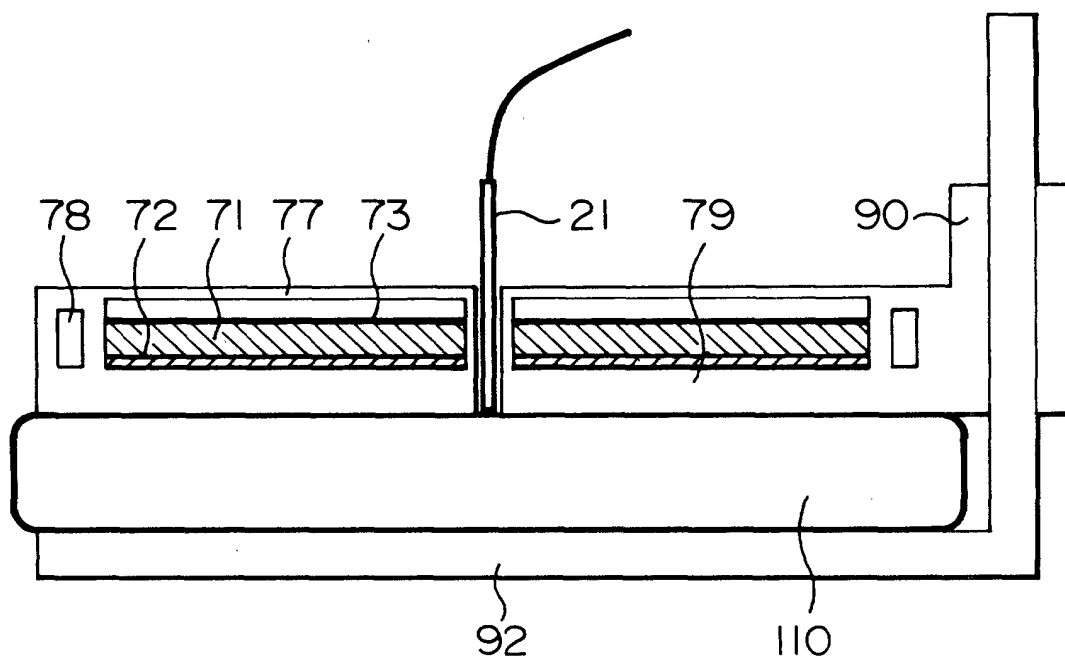


FIG. 23

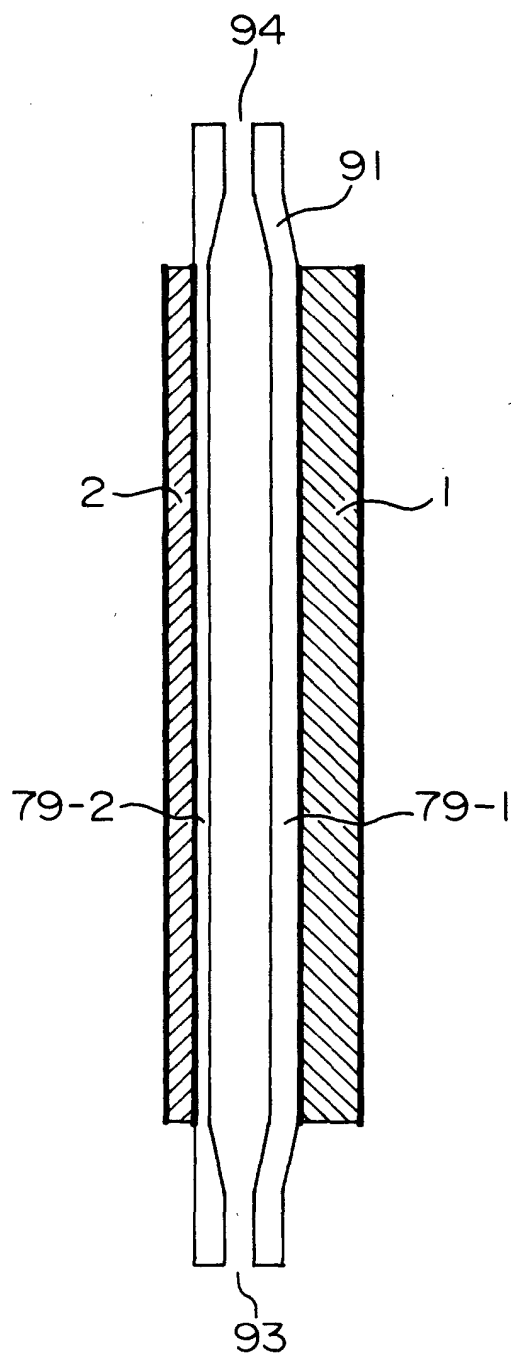


FIG. 24

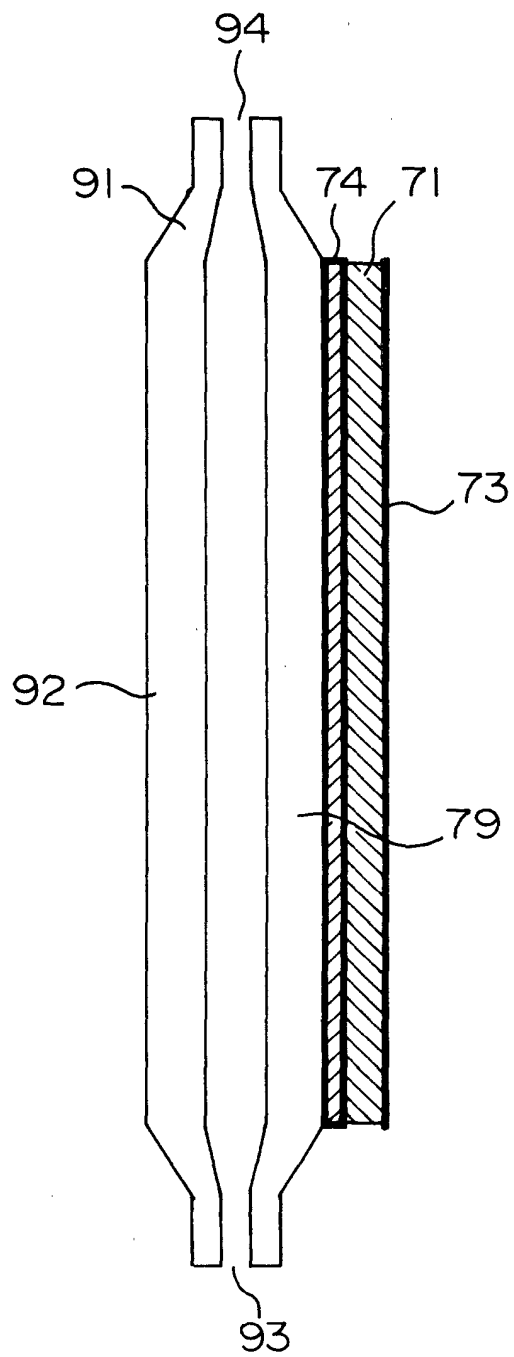


FIG. 25

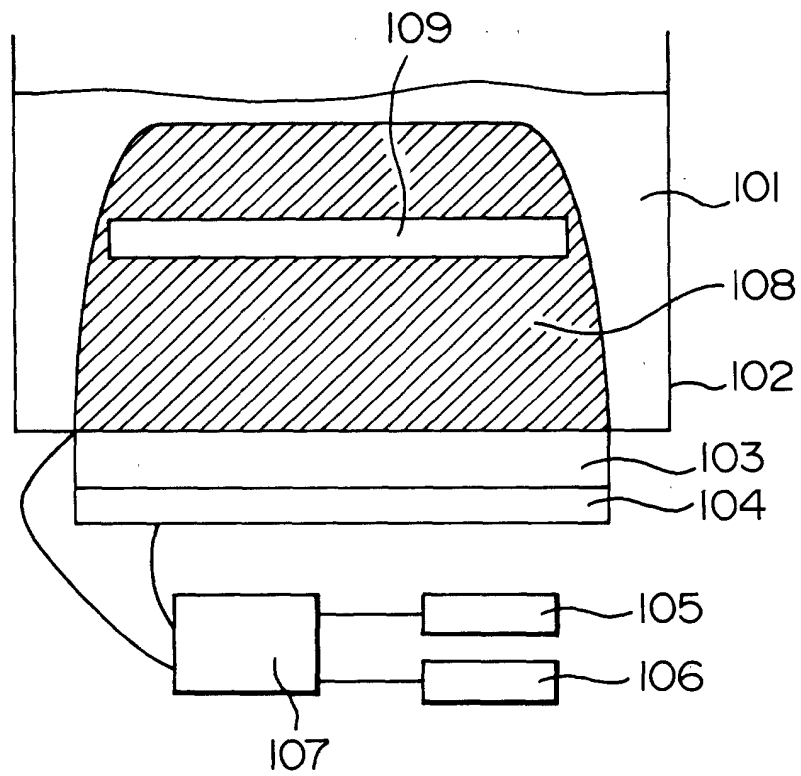


FIG. 26

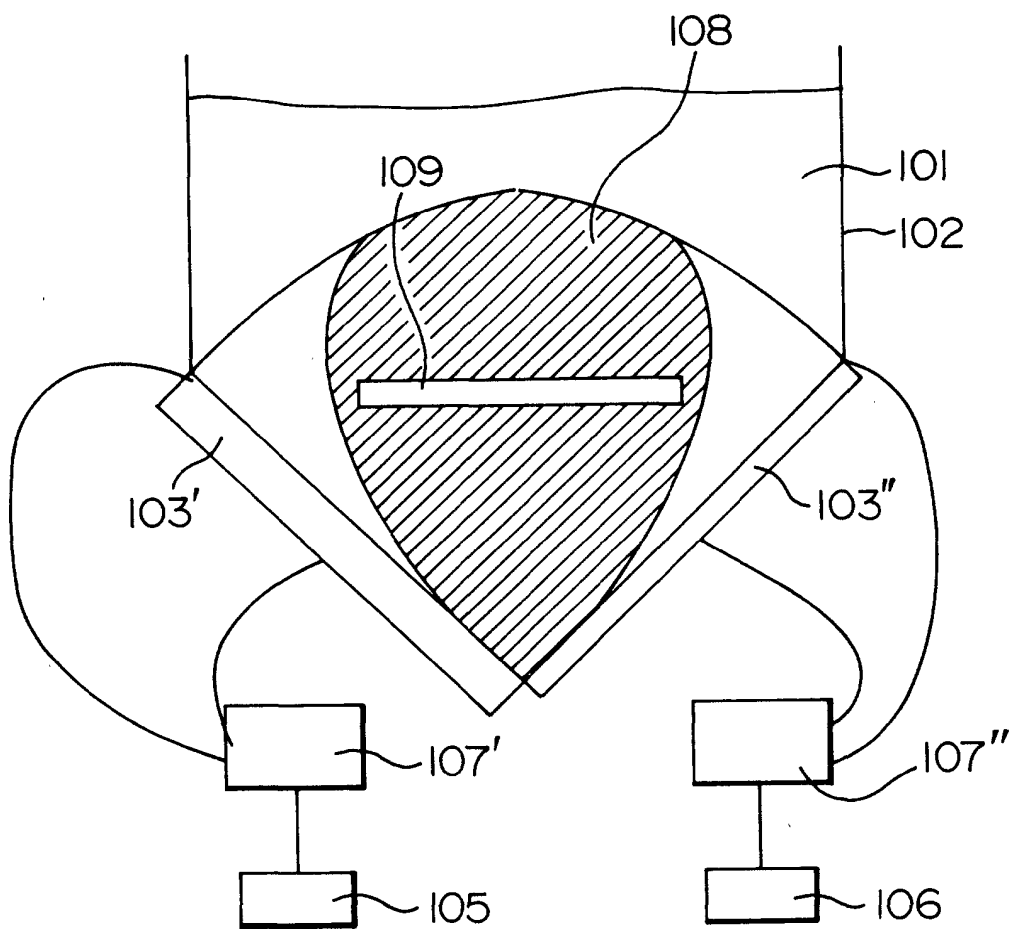


FIG. 27


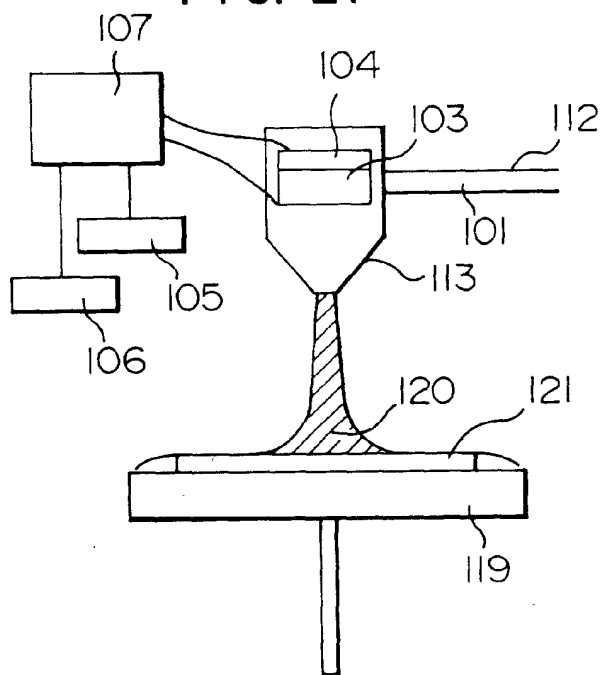


FIG. 28

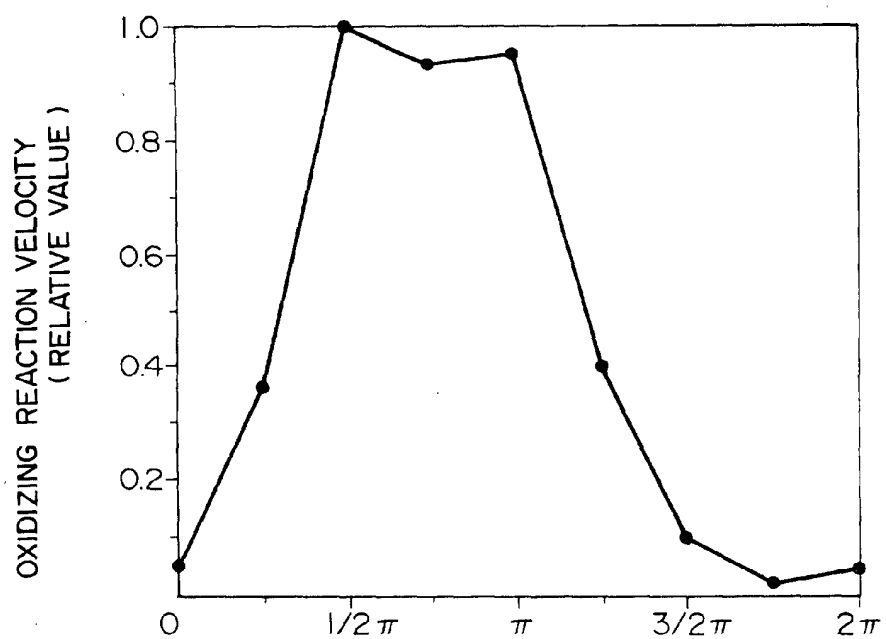

α WHEN THE FUNDAMENTAL FREQUENCY WAVE AND SECOND HARMONIC WAVE ARE REPRESENTED BY $\sin(2\pi f)$ AND $\sin(4\pi f + \alpha)$

FIG. 29

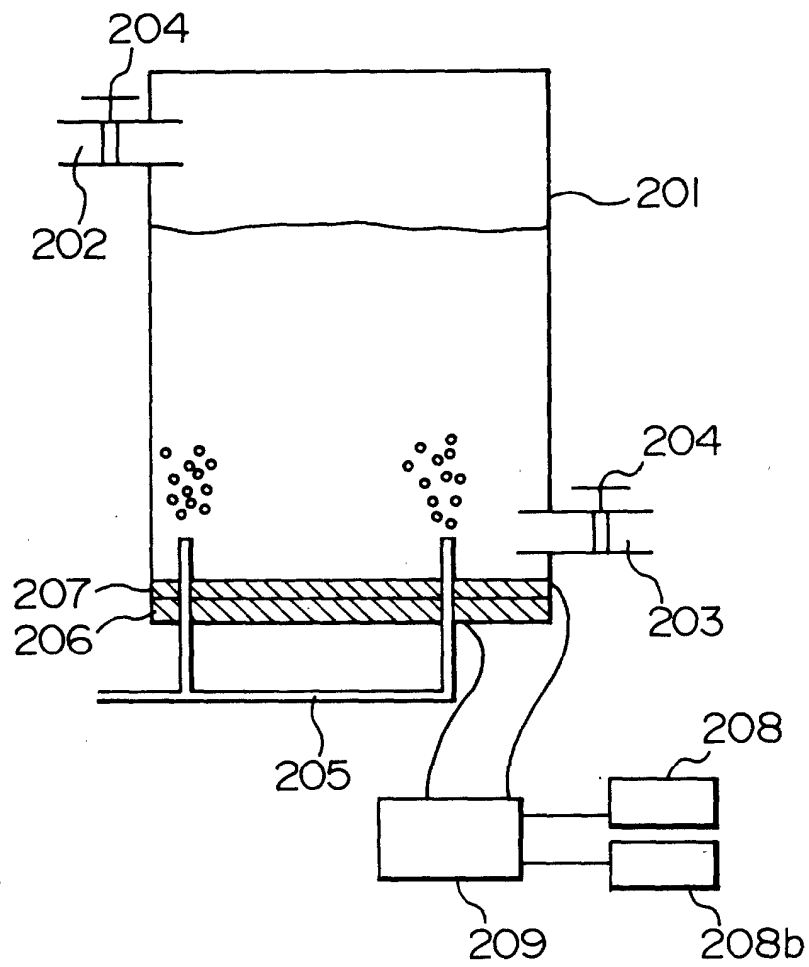


FIG. 30

